



Test Report: HBG-100-24

100W Constant Current Mode LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



■ RELIABILITY TEST

Environment Test

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST



NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	14.4V~24V	I/P: 230VAC O/P: LED MODE Ta: 25°C	14.4V~24V
2	OUTPUT CURRENT ADJUST RANGE (For A-Type only)	2.4A~4A	I/P: 230VAC O/P: SETTING Ta: 25°C	2.3 A~ 4.4 A
3	CURRENT RIPPLE	5.0% max.@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	2.34%
4	CURRENT TOLERANCE	<±5.0%	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	<5%
5	OPEN CIRCUIT VOLTAGE (max)	25V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	24.71V
6	SET UP TIME	500ms/230VAC 2000ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	398ms/230VAC 264ms/115VAC

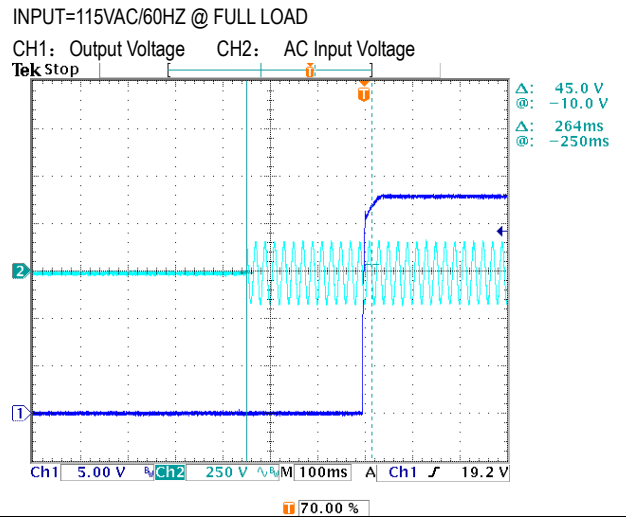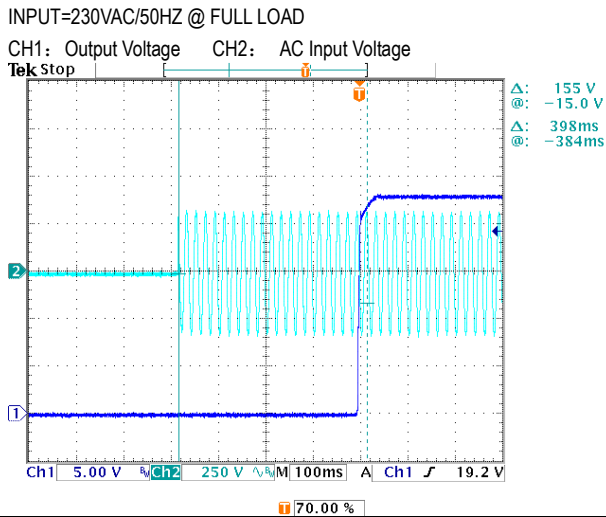



7 DIMMING OPERATION (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10Vdc, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100uA (typ.)



◎ Applying additive 0 ~ 10VDC

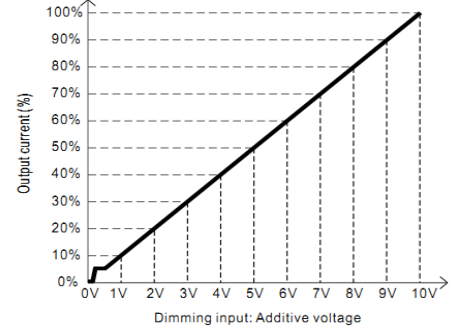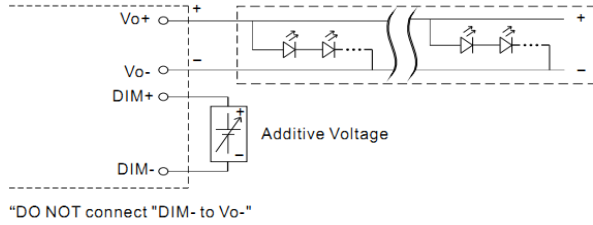

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

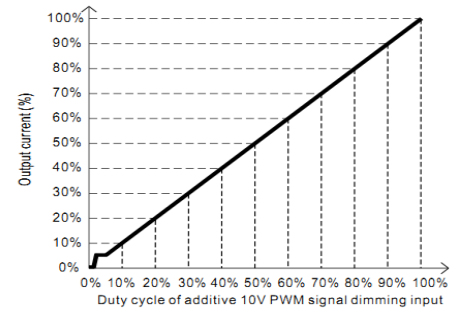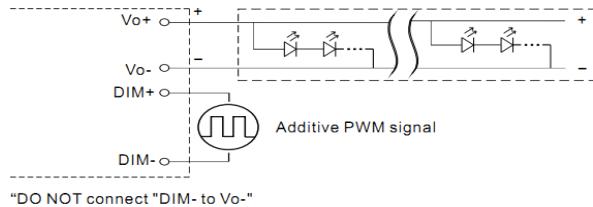

◎ Applying additive resistance:

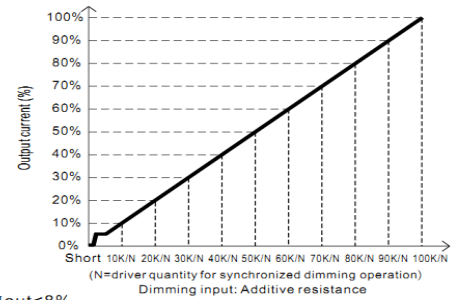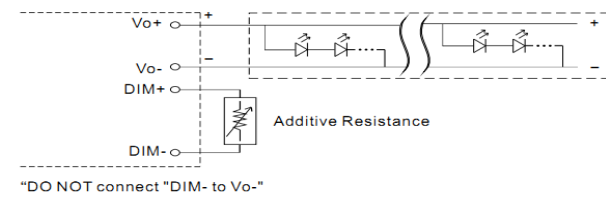

Note : 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.
 2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC

O/P: DIMMING TEST

Ta: 25°C

	V	Short	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
1	Output Current	0	0.518A	0.919A	1.337A	1.738A	2.131A	2.530A	2.924A	3.326A	3.725A	4.055A
	%	0%	12.96%	22.99%	33.42%	43.45%	53.28%	63.26%	73.11%	83.15%	93.13%	101.4%
2	PWM(100Hz)	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
	Output Current	0	0.556A	0.948A	1.358A	1.745A	2.134A	2.520A	2.905A	3.295A	3.680A	4.028A
	%	0%	13.90%	23.70%	33.96%	43.62%	53.35%	62.99%	72.63%	82.37%	92.01%	100.0%
3	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K
	Output Current	0	0.505A	0.908A	1.293A	1.674A	2.054A	2.434A	2.817A	3.198A	3.581A	3.963A
	%	0%	12.62%	22.70%	32.33%	41.84%	51.35%	60.87%	70.42%	79.95%	89.51%	99.67%

TEST RESULT: OK


<p>8 DIMMING OPERATION (primary side;for DA-Type)</p>	<p>※DALI Interface ·Apply DALI signal between DA+ and DA-. ·DALI protocol comprises 16 groups and 64 addresses. ·First step is fixed at 8% of output. I/P: 230 VAC O/P: DIMMING TEST Ta: 25°C TEST RESULT: OK</p>
---	--

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~305V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	1.1A/115VAC 0.5A/230VAC 0.45A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD/75% LOAD Ta: 25°C	I=0.929A/ 115VAC I=0.461A/ 230VAC I=0.385A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.579 mA N-FG: 0.577 mA
5	INRUSH CURRENT(Typ)	60A/230VAC Twidth =550us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I=46A/ 230VAC Twidth =464us


INPUT=230VAC/50HZ @ FULL LOAD

CH2: Input current CH1: AC Input Voltage

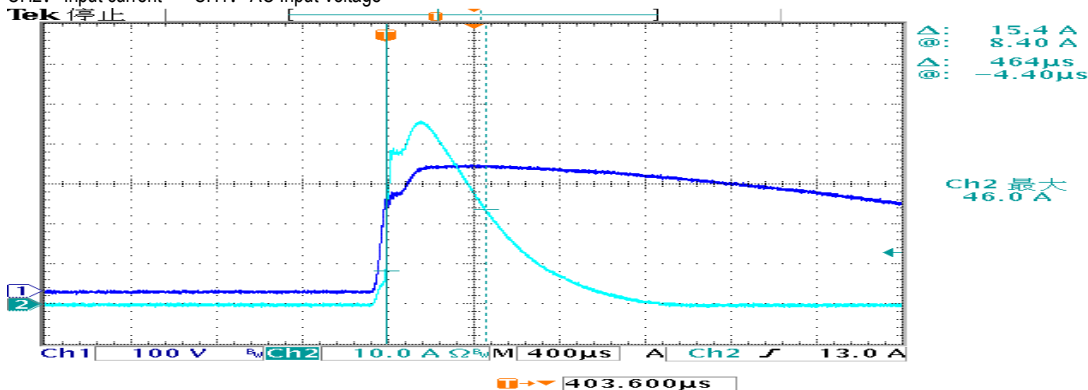


6	EFFICIENCY(Typ)	90.5%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	90.90%
---	-----------------	-------	---	--------

EFFICIENCY vs LOAD

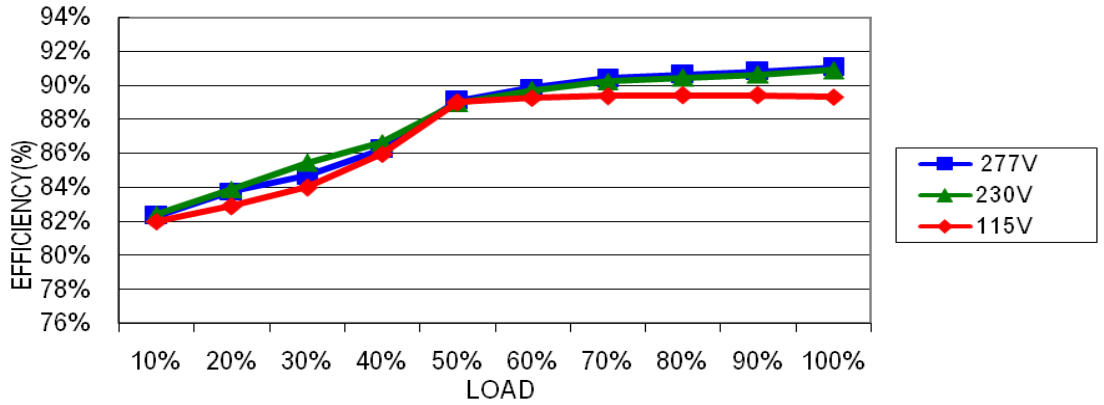


7	POWER FACTOR	0.96/ 115VAC 0.96/ 230VAC 0.94/ 277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.994 /115VAC PF=0.984 /230VAC PF=0.969 /277VAC
---	--------------	--	--	--

P.F vs LOAD

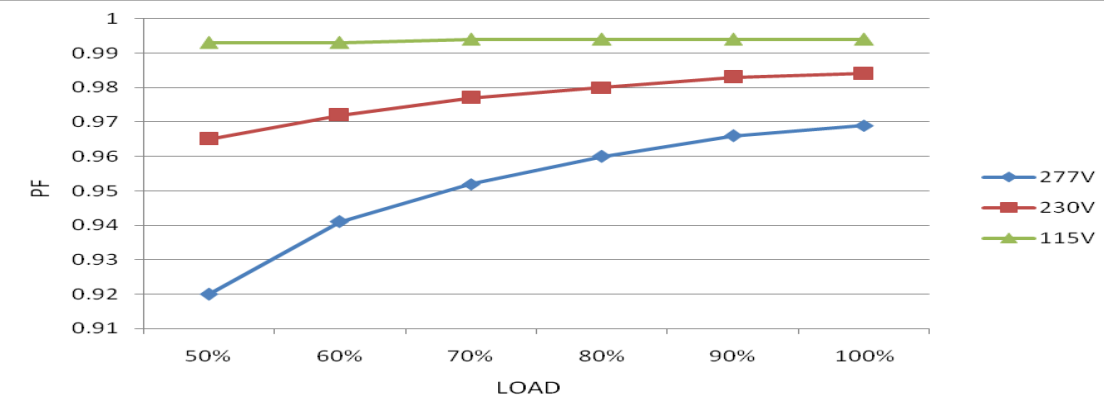

8	TOTAL HARMONIC DISTORTION	THD < 20% (@load ≥ 60%/115VAC, 230VAC; @load ≥ 75%/277VAC)	I/P: 115 VAC/60% LOAD I/P: 230 VAC/60% LOAD I/P: 277 VAC/75% LOAD Ta: 25°C	THD=9.87% @60% load /115VAC THD=14.41% @60% load /230VAC THD=13.10% @75% load /277VAC
---	---------------------------	--	---	---

THD vs LOAD

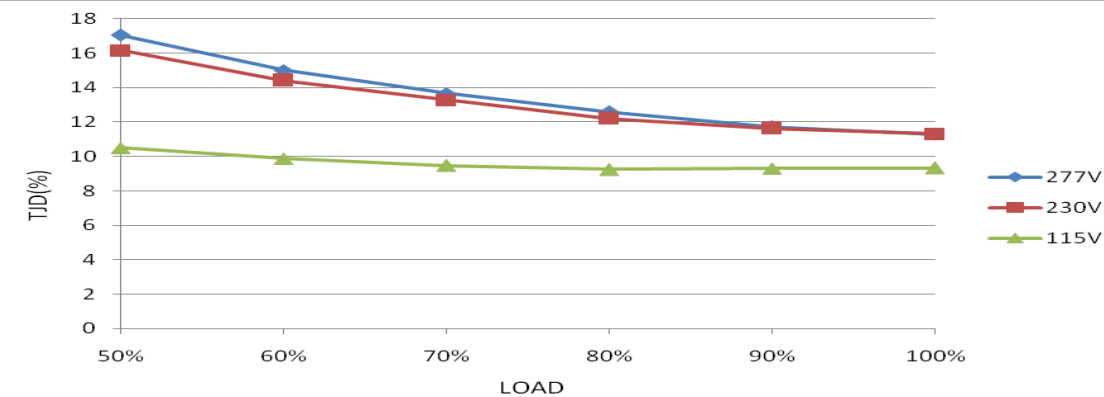

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95 % ~ 108 %	I/P: 100 VAC I/P: 230 VAC I/P: 305VAC O/P: TESTING Ta: 25°C	100.34 %/100 VAC 100.36 %/ 230 VAC 100.40 %/ 305VAC Constant current limiting
1	OVER VOLTAGE PROTECTION	28V~35V	I/P: 90VAC I/P: 230VAC I/P: 305VAC O/P: NO LOAD Ta: 25°C	30.4 V/ 90VAC 30.4 V/ 230VAC 30.4 V/ 305VAC Shut down o/p voltage re-power on to recovery
2	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage re-power on to recovery

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q 1 Rated 700V/12A	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 602 V (2) 480 V (3) 600 V
2	O/P Diode (MOSFET)	Q101 Rated 120V/80A	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 98.6 V (2) 78.0 V (3) 96.4 V
3	Input Capacitor	C5 Rated 82u/450V	I/P: High-Line +3V =308 V O/P: (1) FULL LOAD input on/off (2) NO LOAD input on /Off (3) FULL LOAD /NO LOAD Change Ta: 25°C	(1) 442 V (2) 440 V (3) 420 V
4	Control IC	U1 Rated 38V (MAX.)	I/P: High-Line +3V =308 V O/P: (1) Full Load Turn on /Off (2) Min load Turn on /Off (3) Full Load /Min load Change Ta: 25°C	(1) 22.4 V (2) 21.5 V (3) 22.4 V
5	PFC Power Transistor	Q 2 Rated 600V/11A	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 486 V (2) 420 V (3) 438 V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG: 2.0KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 4.2 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 0.6KVAC/min Ta: 25°C	I/P-O/P: 3.812 mA I/P-FG: 3.798 mA O/P-FG: 3.056 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG: 500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: >9999 MΩ I/P-FG: >9999 MΩ O/P-FG: >9999 MΩ
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta: 25°C /70% RH	17 mΩ


E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 Class C	I/P: 230VAC/50HZ O/P: FULL/60% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 INDUSTRY L-N: 2KV L,N-PE: 4KV	I/P: 230VAC/50HZ O/P: FULL LOAD L-N: 4KV L,N-PE: 6KV Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																												
1	TEMPERATURE RISE TEST	MODEL: HBG-100-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=26.3 °C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=59.0 °C																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=26.3 °C</th> <th>HIGH AMBIENT Ta=59.0 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>52.9°C</td><td>83.3°C</td></tr> <tr><td>2</td><td>C5</td><td>54.1°C</td><td>84.9°C</td></tr> <tr><td>3</td><td>Q2</td><td>55.3°C</td><td>86.3°C</td></tr> <tr><td>4</td><td>Q1</td><td>59.1°C</td><td>90.1°C</td></tr> <tr><td>5</td><td>U1</td><td>50.1°C</td><td>81.0°C</td></tr> <tr><td>6</td><td>T1</td><td>59.6°C</td><td>89.8°C</td></tr> <tr><td>7</td><td>Q101</td><td>55.3°C</td><td>85.9°C</td></tr> <tr><td>8</td><td>C106</td><td>53.5°C</td><td>84.0°C</td></tr> <tr><td>9</td><td>RTH2</td><td>47.3°C</td><td>77.5°C</td></tr> <tr><td>10</td><td>TC</td><td>44.2°C</td><td>74.7°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=26.3 °C	HIGH AMBIENT Ta=59.0 °C	1	BD1	52.9°C	83.3°C	2	C5	54.1°C	84.9°C	3	Q2	55.3°C	86.3°C	4	Q1	59.1°C	90.1°C	5	U1	50.1°C	81.0°C	6	T1	59.6°C	89.8°C	7	Q101	55.3°C	85.9°C	8	C106	53.5°C	84.0°C	9	RTH2	47.3°C	77.5°C	10	TC	44.2°C	74.7°C
NO	Position	ROOM AMBIENT Ta=26.3 °C	HIGH AMBIENT Ta=59.0 °C																																													
1	BD1	52.9°C	83.3°C																																													
2	C5	54.1°C	84.9°C																																													
3	Q2	55.3°C	86.3°C																																													
4	Q1	59.1°C	90.1°C																																													
5	U1	50.1°C	81.0°C																																													
6	T1	59.6°C	89.8°C																																													
7	Q101	55.3°C	85.9°C																																													
8	C106	53.5°C	84.0°C																																													
9	RTH2	47.3°C	77.5°C																																													
10	TC	44.2°C	74.7°C																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/90VAC O/P: FULL /80% LOAD Ta= -45°C /-30°C	TEST: OK																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=60°C HUMIDITY= 95 %R.H	TEST: OK																																												
4	TEMPERATURE COEFFICIENT	±0.03 %/°C (0~50°C)	I/P: 230 VAC O/P: FULL LOAD	±0.005 %/°C (0~50°C)																																												
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																												
6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -45°C ~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC/ FULL LOAD AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST		TEST: OK																																												
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 12min/sweep cycle (4) Acceleration: 5G (5) Test Time: 72min in each axis (X.Y.Z) (6) Ta: 25°C		TEST: OK																																												

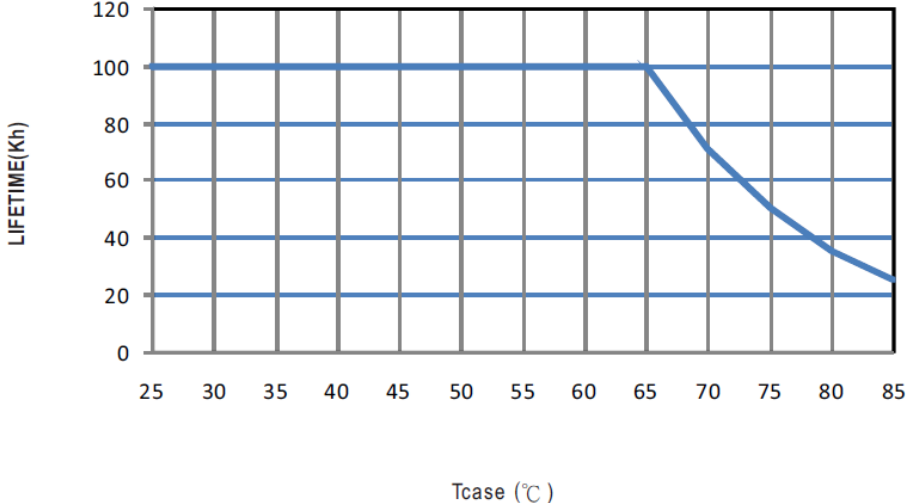8	CAPACITOR LIFE CYCLE	<p>HBG-100-24: SUPPOSE C103 IS THE MOST CRITICAL COMPONENT</p> <p>(1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME</p> <p>(2) I/P: 230VAC O/P: FULL LOAD Ta= 60 °C LIFE TIME</p> <p>(3) I/P: 230VAC O/P: 75% LOAD Ta= 60 °C LIFE TIME</p> <p>(4) I/P: 230VAC O/P: MIN LOAD Ta= 60 °C LIFE TIME</p>	<p>(1) 271950 HRS</p> <p>(2) 28000 HRS</p> <p>(3) 43609 HRS</p> <p>(4) 53804 HRS</p>																												
9	MTBF	<p>Conducted by Parts Stress Analysis Prediction</p> <p>2433.4K hrs min. Telcordia SR-332 (Bellcore) ; 299.3K hrs min. MIL-HDBK-217F (25°C)</p>																													
10	DMTBF/Accelerated Life Test	<p>Demonstration Mean Time Between Failure (Expected Life):</p> <p>Above 50000 hours @ Tc 75 °C</p>  <table border="1"> <caption>Approximate data points from the Lifetime vs Temperature graph</caption> <thead> <tr> <th>Tcase (°C)</th> <th>Lifetime (kh)</th> </tr> </thead> <tbody> <tr><td>25</td><td>100</td></tr> <tr><td>30</td><td>100</td></tr> <tr><td>35</td><td>100</td></tr> <tr><td>40</td><td>100</td></tr> <tr><td>45</td><td>100</td></tr> <tr><td>50</td><td>100</td></tr> <tr><td>55</td><td>100</td></tr> <tr><td>60</td><td>100</td></tr> <tr><td>65</td><td>100</td></tr> <tr><td>70</td><td>70</td></tr> <tr><td>75</td><td>50</td></tr> <tr><td>80</td><td>35</td></tr> <tr><td>85</td><td>25</td></tr> </tbody> </table>		Tcase (°C)	Lifetime (kh)	25	100	30	100	35	100	40	100	45	100	50	100	55	100	60	100	65	100	70	70	75	50	80	35	85	25
Tcase (°C)	Lifetime (kh)																														
25	100																														
30	100																														
35	100																														
40	100																														
45	100																														
50	100																														
55	100																														
60	100																														
65	100																														
70	70																														
75	50																														
80	35																														
85	25																														

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	SHENJW/ZHUOKB	SKY	LIUWY