



# Test Report: RT-65B

---

65W Triple Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 4.75V~ 5.5 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	4.60V~5.70V/230VAC 4.60V~5.70V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1 : -2%~2 % V2 : -6%~6 % V3 : -5%~5 %	I/P: 88VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1 : -0.13%~0.14% V2 : -2.87%~1.30% V2 : -2.18%~3.22%
3	LINE REGULATION (Max)	V1: -0.5%~0.5% V2: -1.5%~1.5% V3: -0.5%~0.5%	I/P: 88VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1 : -0.02%~0.07% V2 : -0.05%~0.03% V3 : -0.01%~0.01%
4	LOAD REGULATION(Max)	V1: -1%~1% V2: -3%~3% V3: -1%~1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1 : -0.13%~0.14% V2 : -2.87%~1.30% V2 : -2.18%~3.22%
5	OVER/UNDERSHOOT TEST	< ±10%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	1.2%
6	RIPPLE & NOISE(Max)	V1: 80mVp-p V2: 120mVp-p V3: 80mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 31mVp-p V2: 31mVp-p V3: 21mVp-p


high frequency (V1) :

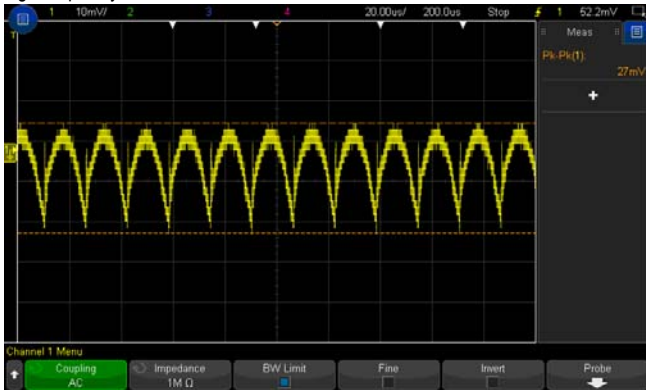


low frequency (V1) :




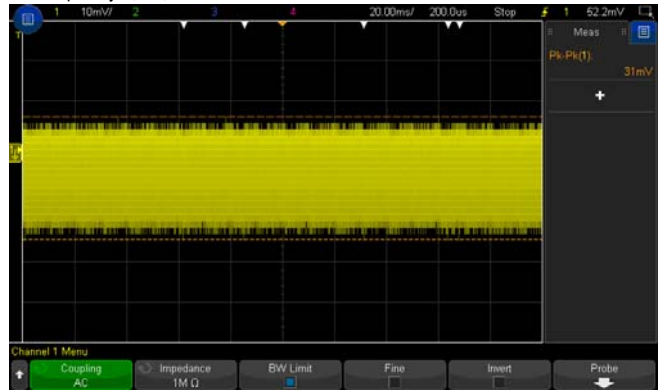


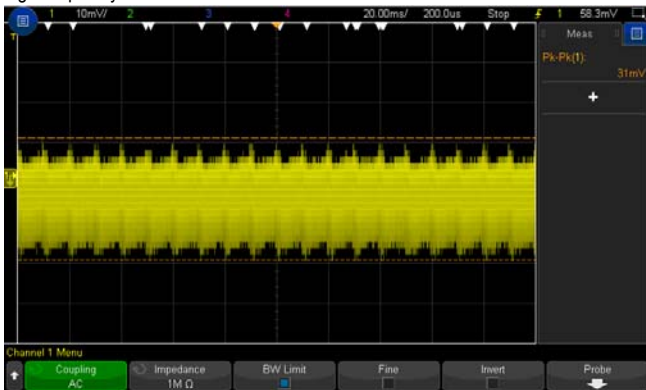


high frequency (V2) :

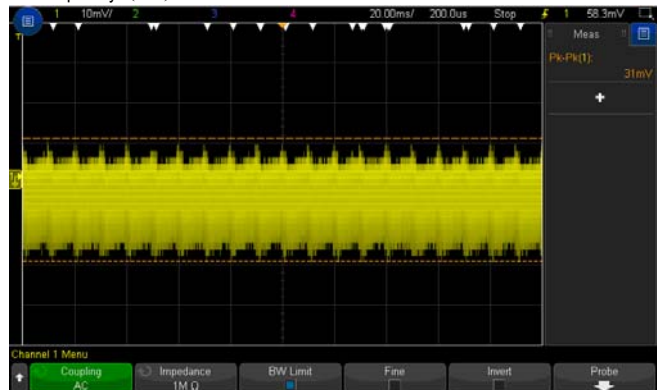







low frequency (V2) :

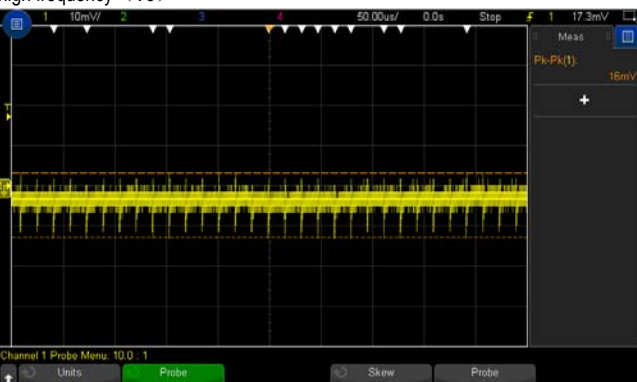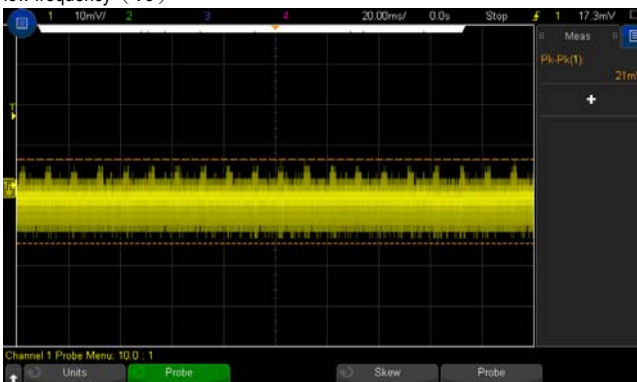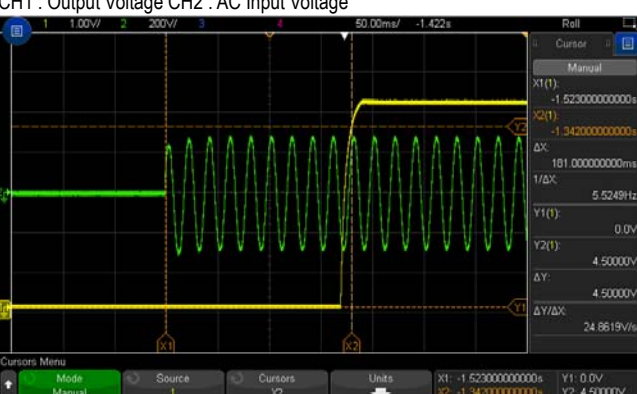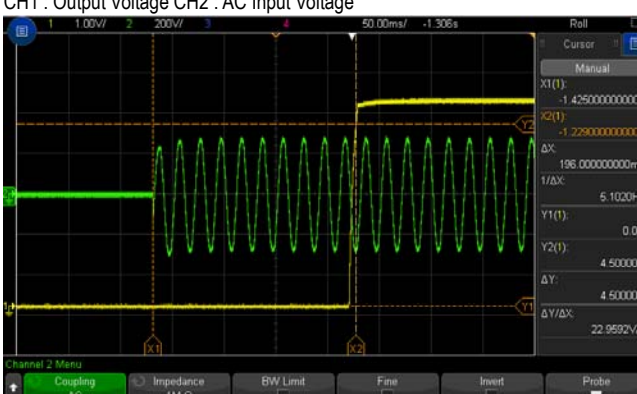

	<p>high frequency (V3) :</p> 	<p>low frequency (V3) :</p> 	
<p>7 SET UP TIME(Max)</p>	<p>230VAC/500ms 115VAC/1200ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 181 ms 115VAC/ 196ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 	
<p>8 RISE TIME (Max)</p>	<p>230VAC/20ms 115VAC/30ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 6.39ms 115VAC/ 7.34ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p> 	
<p>9 HOLD UP TIME (Typ.)</p>	<p>230VAC/60ms 115VAC/14ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 82.0ms 115VAC/ 15.4ms</p>

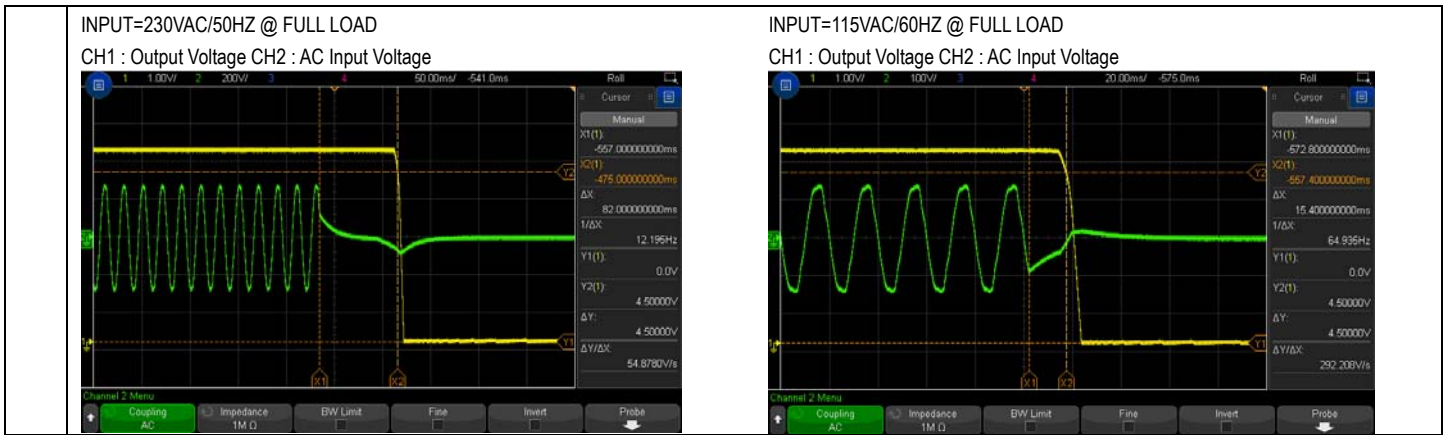


<p>10 DYNAMIC LOAD</p>	<p>V1: 1000 mVp-p V2: 1200 mVp-p V3: 1200 mVp-p</p>	<p>I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C</p>	<table border="1"> <thead> <tr> <th></th> <th>(1)</th> <th>(2)</th> </tr> </thead> <tbody> <tr> <td>V1:</td> <td>179mVp-p</td> <td>149mVp-p</td> </tr> <tr> <td>V2:</td> <td>330mVp-p</td> <td>336mVp-p</td> </tr> <tr> <td>V3:</td> <td>48mVp-p</td> <td>50mVp-p</td> </tr> </tbody> </table>		(1)	(2)	V1:	179mVp-p	149mVp-p	V2:	330mVp-p	336mVp-p	V3:	48mVp-p	50mVp-p
	(1)	(2)													
V1:	179mVp-p	149mVp-p													
V2:	330mVp-p	336mVp-p													
V3:	48mVp-p	50mVp-p													

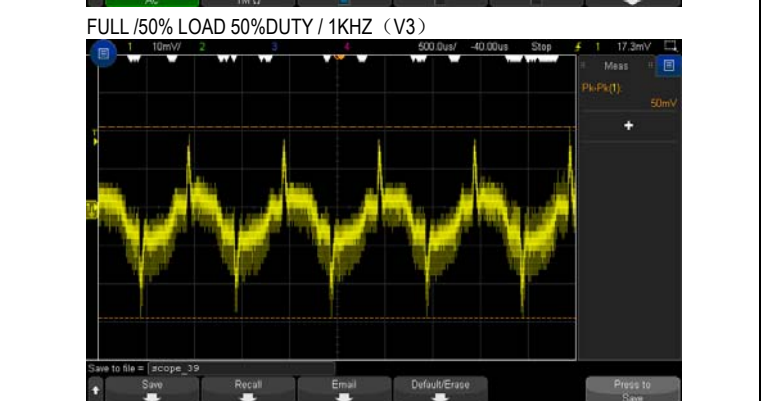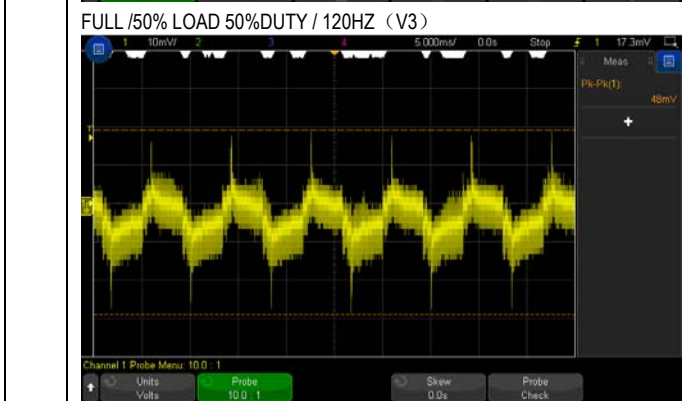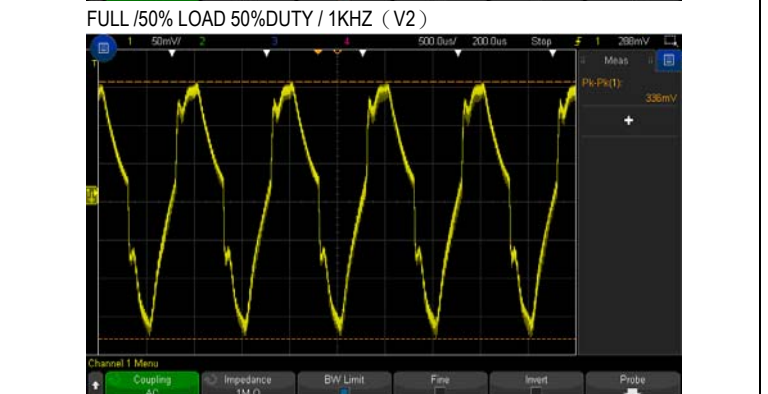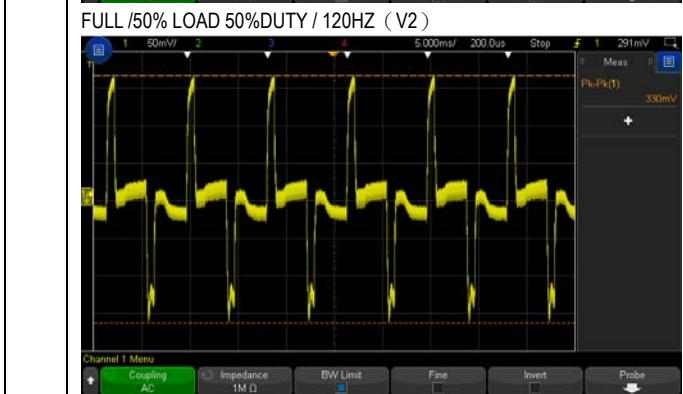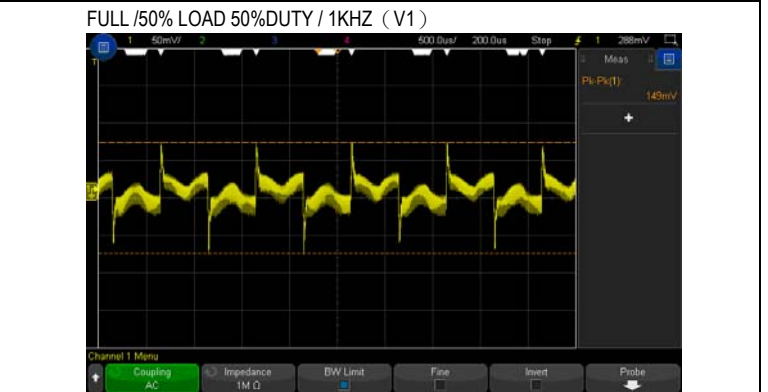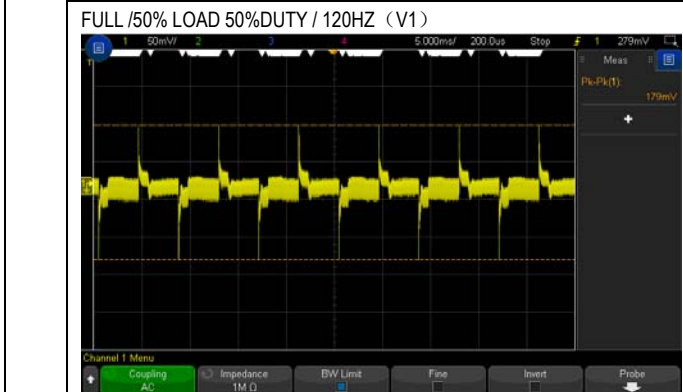

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	88VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	75V~264V
			I/P: LOW-LINE-3V=85 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:88 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.2A 115V/ 2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=0.66A/ 230VAC I=1.08A/ 115VAC
4	LEAKAGE CURRENT	<2 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	0.4 mA
5	EFFICIENCY(Typ.)	76%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	76.7%


EFFICIENCY vs LOAD

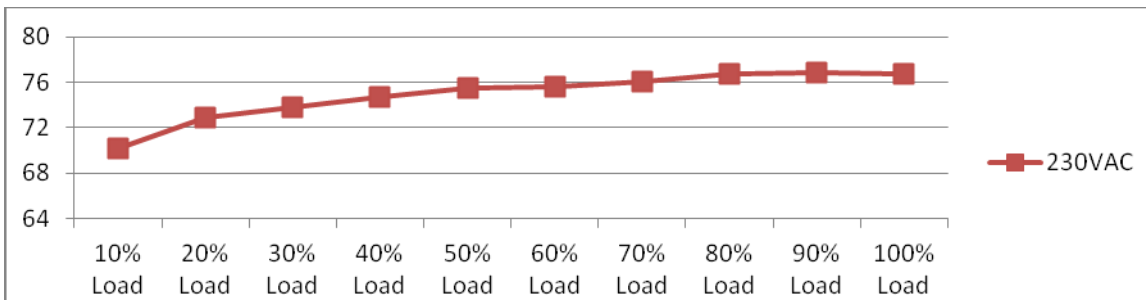

6	INRUSH CURRENT(Typ.)	230V / 50A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	41.2A
---	----------------------	--------------------------	---	-------

INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current

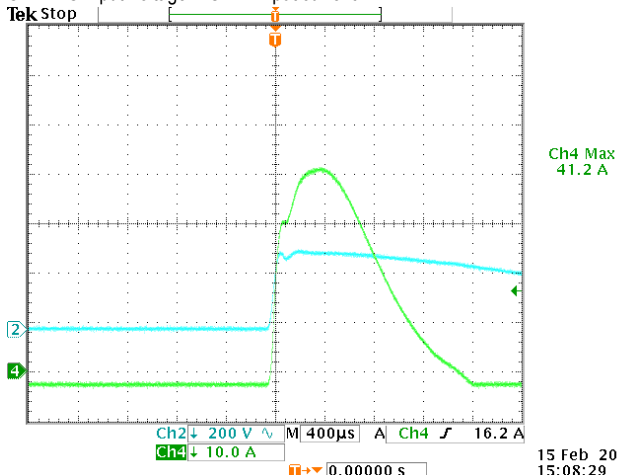

15 Feb 2019  
15:08:29

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~150%	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	121.3%/ 264VAC 124.0%/ 230VAC 115.9%/ 115VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	5.75V~6.75V	I/P: 264VAC I/P: 230VAC I/P: 88VAC O/P: MIN LOAD Ta:25°C	6.03V/ 264VAC 6.03V/ 230VAC 6.03V/ 88VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 88VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 600 V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta:25°C	VDS: (1) 568V (2) 564V (3) 560V
2	O/P Diode	D50 Rated : 200 V  D55 Rated : 100 V  D56 Rated : 200 V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta:25°C	D50 D55 (1) 52.3V (1) 48.3V (2) 56.4V (2) 48.3V (3) 51.5V (3) 43.5V  D56 (1) 108.7V (2) 83.8V (3) 119.2V
3	Input Capacitor Voltage	C5 Rated : 150 $\mu$ / 400 V	I/P: High-Line +3V =267V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 396V (2) 376V (3) 376V (4) 371V
4	Control IC Voltage Test	U1 Rated : 7.2V~ 16 V	AC ON/OFF I/P: High-Line +3V =267 V O/P(1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin(Low LINE) Ta:25°C	(1) 12.9V (2) 12.9V (3) 12.9V (4) 12.9V (5) 12.9V



5	Clamp Diode Peak Voltage	D1 Rated : 600 V	AC ON/OFF I/P : High-Line +3V = 267 V O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1) 556V (2) 556V
---	--------------------------	---------------------	--	----------------------

### SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG:2 KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P- FG: 2.4 KVAC/min O/P - FG: 0.6 KVAC/min Ta:25°C	I/P-O/P:3.37mA I/P-FG:1.45mA O/P-FG:1.26mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P- FG:500VDC>100MΩ O/P- FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P- FG: 600 VDC Ta:25°C	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta: 25°C/70%RH	6mΩ

### E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L/N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report.			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																
1	TEMPERATURE RISE TEST	MODEL : RT-65B 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 23.7 °C 2. HIGH AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta=39.7°C																																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 23.7 °C</th> <th>HIGH AMBIENT Ta=39.7 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>55.2°C</td><td>71.7°C</td></tr> <tr><td>2</td><td>C5</td><td>55.0°C</td><td>71.7°C</td></tr> <tr><td>3</td><td>Q1</td><td>71.8°C</td><td>89.8°C</td></tr> <tr><td>4</td><td>U1</td><td>67.1°C</td><td>83.7°C</td></tr> <tr><td>5</td><td>D1</td><td>74.4°C</td><td>90.3°C</td></tr> <tr><td>6</td><td>T1coil</td><td>87.2°C</td><td>103.9°C</td></tr> <tr><td>7</td><td>T1core</td><td>80.9°C</td><td>97.7°C</td></tr> <tr><td>8</td><td>D55</td><td>95.7°C</td><td>111.3°C</td></tr> <tr><td>9</td><td>D50</td><td>81.1°C</td><td>97.5°C</td></tr> <tr><td>10</td><td>D56</td><td>86.7°C</td><td>102.2°C</td></tr> <tr><td>11</td><td>RG1</td><td>69.2°C</td><td>85.8°C</td></tr> <tr><td>12</td><td>C56</td><td>70.1°C</td><td>86.1°C</td></tr> <tr><td>13</td><td>C63</td><td>65.4°C</td><td>82.0°C</td></tr> <tr><td>14</td><td>C51</td><td>72.2°C</td><td>88.1°C</td></tr> <tr><td>15</td><td>LF1</td><td>54.8°C</td><td>70.8°C</td></tr> <tr><td>16</td><td>R2</td><td>87.8°C</td><td>101.5°C</td></tr> <tr><td>17</td><td>R8</td><td>62.7°C</td><td>79.5°C</td></tr> <tr><td>18</td><td>R50</td><td>80.4°C</td><td>96.5°C</td></tr> <tr><td>19</td><td>L50</td><td>60.6°C</td><td>76.8°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 23.7 °C	HIGH AMBIENT Ta=39.7 °C	1	BD1	55.2°C	71.7°C	2	C5	55.0°C	71.7°C	3	Q1	71.8°C	89.8°C	4	U1	67.1°C	83.7°C	5	D1	74.4°C	90.3°C	6	T1coil	87.2°C	103.9°C	7	T1core	80.9°C	97.7°C	8	D55	95.7°C	111.3°C	9	D50	81.1°C	97.5°C	10	D56	86.7°C	102.2°C	11	RG1	69.2°C	85.8°C	12	C56	70.1°C	86.1°C	13	C63	65.4°C	82.0°C	14	C51	72.2°C	88.1°C	15	LF1	54.8°C	70.8°C	16	R2	87.8°C	101.5°C	17	R8	62.7°C	79.5°C	18	R50	80.4°C	96.5°C	19	L50	60.6°C	76.8°C
NO	Position	ROOM AMBIENT Ta= 23.7 °C	HIGH AMBIENT Ta=39.7 °C																																																																																	
1	BD1	55.2°C	71.7°C																																																																																	
2	C5	55.0°C	71.7°C																																																																																	
3	Q1	71.8°C	89.8°C																																																																																	
4	U1	67.1°C	83.7°C																																																																																	
5	D1	74.4°C	90.3°C																																																																																	
6	T1coil	87.2°C	103.9°C																																																																																	
7	T1core	80.9°C	97.7°C																																																																																	
8	D55	95.7°C	111.3°C																																																																																	
9	D50	81.1°C	97.5°C																																																																																	
10	D56	86.7°C	102.2°C																																																																																	
11	RG1	69.2°C	85.8°C																																																																																	
12	C56	70.1°C	86.1°C																																																																																	
13	C63	65.4°C	82.0°C																																																																																	
14	C51	72.2°C	88.1°C																																																																																	
15	LF1	54.8°C	70.8°C																																																																																	
16	R2	87.8°C	101.5°C																																																																																	
17	R8	62.7°C	79.5°C																																																																																	
18	R50	80.4°C	96.5°C																																																																																	
19	L50	60.6°C	76.8°C																																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 230 VAC O/P : 119% LOAD Ta : 25°C	TEST : OK																																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/115VAC O/P : 100 % LOAD Ta= -25°C	TEST : OK																																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL40°C /95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta=40 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																
5	TEMPERATURE COEFFICIENT	± 0.03%/°C (0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.0081%/°C (0~50°C)																																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC		TEST : OK																																																																																





7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	TEST : OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C56 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=40 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=40 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 40 °C LIFE TIME	(1) 152304.1HRS (2) 53832.9HRS (3) 97053.6 HRS (4) 175081.5HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 254.6K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		Wangdz

2018.4.30 GP-A50-F010