



TEST REPORT: IRM-01-12

1W Single Output Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test


■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST
OUTPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE RANGE	CH1: 11.88V ~ 12.12V	I/P: 230VAC O/P: MIN LOAD TA: 25°C	CH1: 11.95V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: 2.5% ~ -2.5%	I/P: 100VAC / 305VAC O/P: FULL / MINLOAD TA= 25°C	V1: -0.42% ~ -0.50%
3	LINE REGULATION (MAX.)	V1: 0.5% ~ -0.5%	I/P: 100VAC / 305VAC O/P: FULL LOAD TA: 25°C	V1: 0.00% ~ -0.08%
4	LOAD REGULATION (MAX.)	V1: 0.5% ~ -0.5%	I/P: 230VAC O/P: MIN LOAD ~ FULL LOAD TA: 25°C	V1: 0.00% ~ -0.08%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P: FULL LOAD TA: 25°C	TEST< 3.36 %
6	RIPPLE & NOISE(Max)	V1: 150 mVp-p	I/P: 230VAC O/P: FULL LOAD TA: 25°C	V1: 72.8 mVp-p
7	SET UP TIME (MAX.)	230VAC : 600ms	I/P: 230VAC	230VAC : 14ms
		115VAC : 600ms	I/P: 115VAC	115VAC : 12ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 8.4ms 115VAC : 8.4ms

8

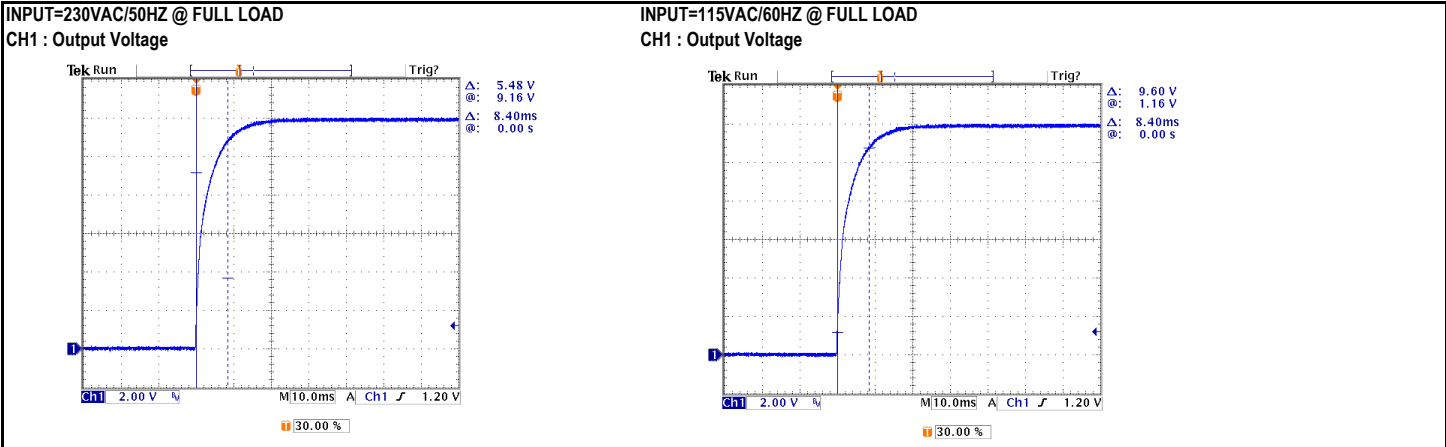


HOLD UP TIME (TYP.)	230VAC : 40ms	I/P: 230VAC	230VAC : 102.0ms
	115VAC : 12ms	I/P: 115VAC	115VAC : 23.2ms
		O/P: FULL LOAD	
		TA : 25°C	

9

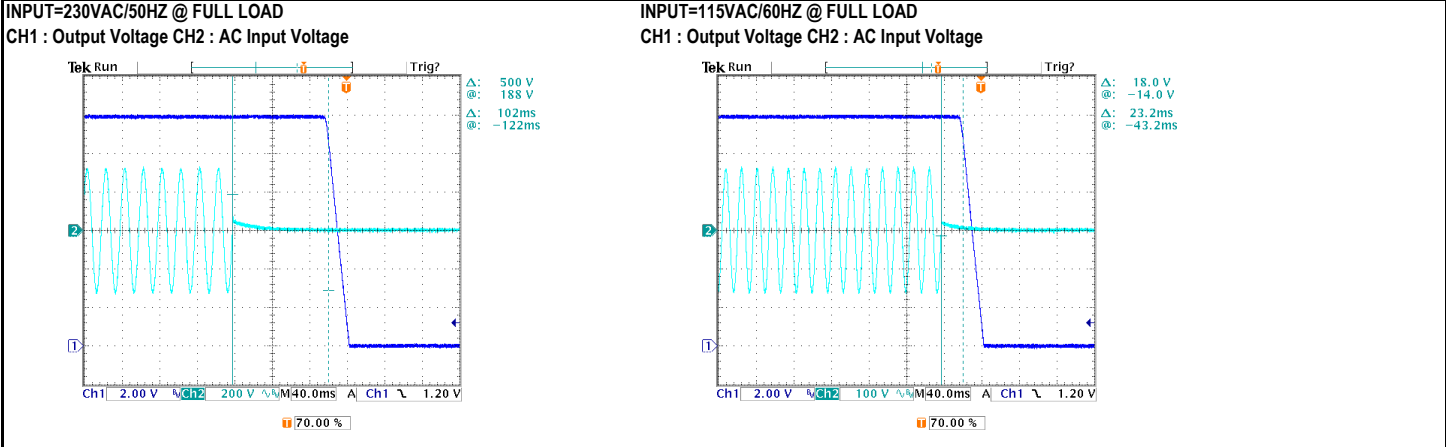


DYNAMIC LOAD	V1: 1200 mVp-p	I/P: 230VAC	(1). (2). unit:mVp-p
		O/P:	104.0mv 82.8mv
		(1)Full/Min load 50%duty/120HZ	
		(2)Full/Min load 50%duty/1KHZ	
		TA : 25°C	

10

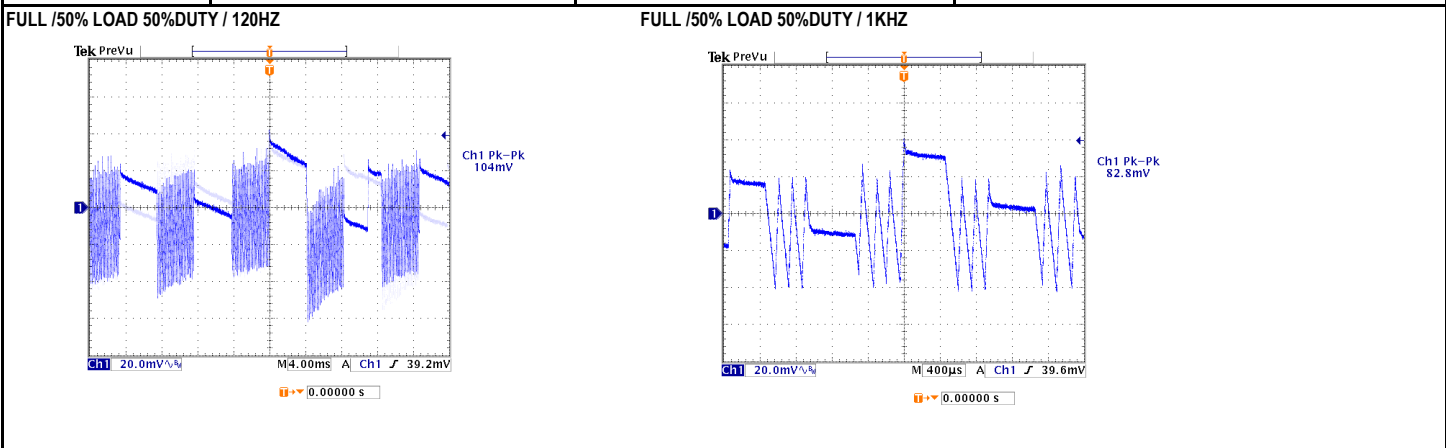


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 305VAC 120VDC ~ 430VDC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	44.0VAC ~ 305VAC 77VDC ~ 430VDC
			I/P: LOW-LINE = 97VAC HIGH-LINE = 315VAC O/P: FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P: 100VAC ~ 305VAC O/P: FULL-MIN LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (TYP.)	0.018A / 230VAC 0.025A / 115VAC 0.016A / 277VAC	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA : 25°C	I= 0.01000A / 230VAC I= 0.02000A / 115VAC I= 0.00940A / 277VAC
4	LEAKAGE CURRENT	< 0.25mA	I/P: 277VAC O/P: MIN LOAD TA : 25°C	L-FG: 0.0709 mA N-FG: 0.0708 mA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P: 230VAC O/P: MIN LOAD TA : 25°C	< 0.0344 W
6	EFFICIENCY (TYP.)	74.0%	I/P: 230VAC O/P: FULL LOAD TA : 25°C	79.38 %

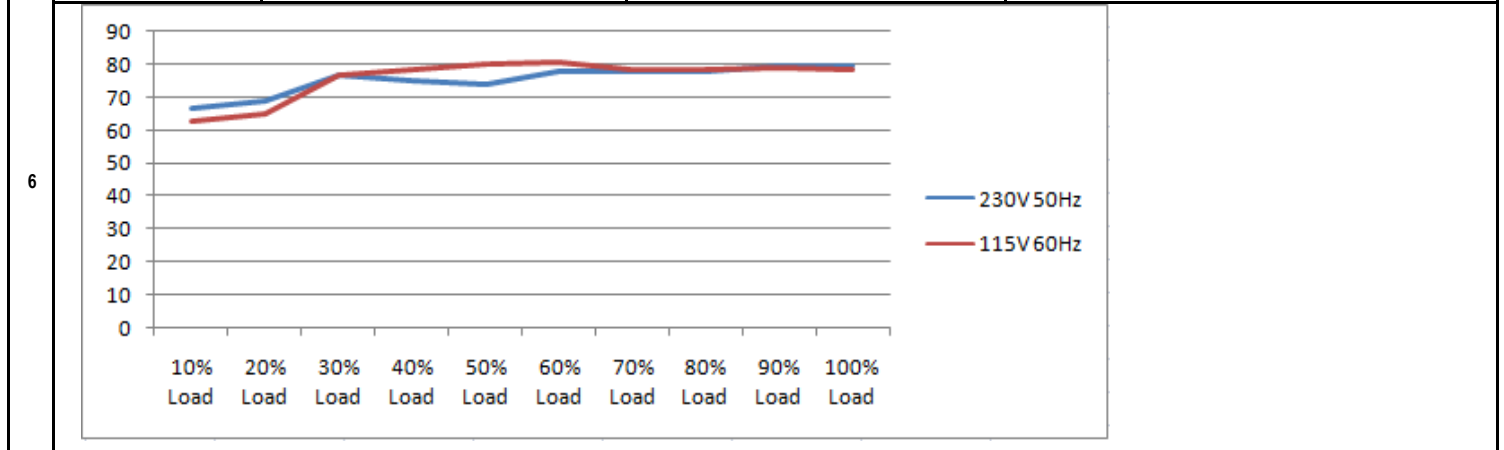

7	INRUSH CURRENT (TYP.)	10A / 230VAC 5A / 115VAC twidth= 0 us measured at 50% Ipeak COLD START	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA : 25°C	I= 5.64A / 230VAC I= 3.70A / 115VAC
		<p>INPUT=230VAC/50HZ @ FULL LOAD INPUT=115VAC/50HZ @ FULL LOAD</p> <p>CH2 : Input current (1V=1A) CH4 : AC Input Voltage CH2 : Input current (1V=1A) CH4 : AC Input Voltage</p>		

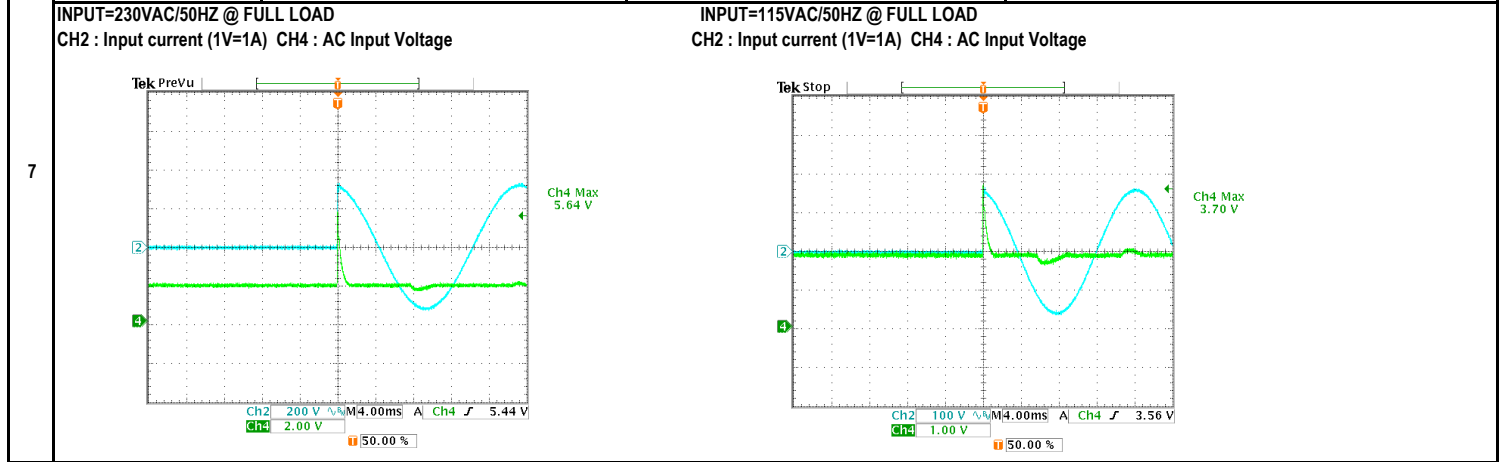



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	> 110%	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING TA: 25°C	766.0% 305VAC 646.0% 230VAC 478.0% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	12.60V ~ 16.20V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD TA: 25°C	15.10V 305VAC 15.10V 230VAC 15.10V 85VAC Shut off o/p voltage, clamping by zener diode
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated: 700V 0.4A	I/P: 315VAC VDS : O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta: 25°C	VIN: 315VAC VDS: (1). 638.00V (2). 674.00V (3). 628.00V
2	Input Capacitor	C6 Rated: 5uf 450V	I/P: 315VAC O/P: (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta: 25°C	(1). 438.00V (2). 440.00V (3). 440.00V
3	Control IC	U1 Rated: 9.00V (max) -0.3V (min)	I/P: 315VAC O/P: (1)Full Load (2)Output Short Change (4)Low Line No Load Vo(min) Ta: 25°C	U1 (1). 6.56V (2). 6.36V (3). 6.36V (4). 6.56V
5	O/P Diode	D100 Rated: 80V 2.0A	I/P: 315VAC O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta: 25°C	(1). 67.20V (2). 54.80V (3). 66.80V
6	Clamp Diode	D1 Rated: 1000V 1.0A	I/P: 315VAC O/P: (1)Full load continue Ta: 25°C	(1). 606.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.000KVAC /min	I/P-O/P: 3.300KVAC /min Ta: 25°C	I/P-O/P: 0.50mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500VDC Ta: 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE



E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD / 50% LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 1KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																		
1	TEMPERATURE RISE TEST	MODEL: IRM-01-12 1. ROOM AMBIENT BURN-IN: 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 15.9°C 2. HIGH AMBIENT BURN-IN: 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 75.0°C	ROOM AMBIENT Ta: 15.9°C HIGH AMBIENT Ta: 75.0°C																																																																			
			<table border="1"> <thead> <tr> <th>NO.</th> <th>Position</th> <th>ROOM AMBIENT Ta</th> <th>15.9°C</th> <th>HIGH AMBIENT Ta:</th> <th>75.0°C</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>C101</td> <td></td> <td>27.1°C</td> <td></td> <td>82.4°C</td> </tr> <tr> <td>2</td> <td>T1</td> <td></td> <td>28.9°C</td> <td></td> <td>84.5°C</td> </tr> <tr> <td>3</td> <td>C6</td> <td></td> <td>24.9°C</td> <td></td> <td>82.2°C</td> </tr> <tr> <td>4</td> <td>BD1</td> <td></td> <td>26.1°C</td> <td></td> <td>83.5°C</td> </tr> <tr> <td>5</td> <td>R2</td> <td></td> <td>24.6°C</td> <td></td> <td>82.1°C</td> </tr> <tr> <td>6</td> <td>L1</td> <td></td> <td>25.6°C</td> <td></td> <td>83.0°C</td> </tr> <tr> <td>7</td> <td>U1</td> <td></td> <td>28.2°C</td> <td></td> <td>85.7°C</td> </tr> <tr> <td>8</td> <td>D100</td> <td></td> <td>31.5°C</td> <td></td> <td>83.0°C</td> </tr> <tr> <td>9</td> <td>D1</td> <td></td> <td>27.9°C</td> <td></td> <td>84.5°C</td> </tr> <tr> <td>10</td> <td>CASE</td> <td></td> <td>26.4°C</td> <td></td> <td>82.4°C</td> </tr> </tbody> </table>	NO.	Position	ROOM AMBIENT Ta	15.9°C	HIGH AMBIENT Ta:	75.0°C	1	C101		27.1°C		82.4°C	2	T1		28.9°C		84.5°C	3	C6		24.9°C		82.2°C	4	BD1		26.1°C		83.5°C	5	R2		24.6°C		82.1°C	6	L1		25.6°C		83.0°C	7	U1		28.2°C		85.7°C	8	D100		31.5°C		83.0°C	9	D1		27.9°C		84.5°C	10	CASE		26.4°C		82.4°C	
NO.	Position	ROOM AMBIENT Ta	15.9°C	HIGH AMBIENT Ta:	75.0°C																																																																	
1	C101		27.1°C		82.4°C																																																																	
2	T1		28.9°C		84.5°C																																																																	
3	C6		24.9°C		82.2°C																																																																	
4	BD1		26.1°C		83.5°C																																																																	
5	R2		24.6°C		82.1°C																																																																	
6	L1		25.6°C		83.0°C																																																																	
7	U1		28.2°C		85.7°C																																																																	
8	D100		31.5°C		83.0°C																																																																	
9	D1		27.9°C		84.5°C																																																																	
10	CASE		26.4°C		82.4°C																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230VAC O/P: 538.92% LOAD Ta: 25°C	TEST: OK																																																																		
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 305VAC / 100VAC O/P: FULL LOAD Ta: -30.0°C	TEST: OK																																																																		
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 75°C NO DAMAGE	I/P: 315VAC O/P: FULL LOAD Ta: 75°C HUMIDITY= 95.0% RH	TEST: OK																																																																		
5	TEMPERATURE COEFFICIENT	±0.03% /(0°C~75°C)	I/P: 230VAC O/P: FULL LOAD	±0.0000% /(0°C~75°C)																																																																		
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -40°C ~ +100°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																																		
7	THERMAL SHOCK TEST	1. Thermal shock Temperature: -35°C ~ +80°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC Full Load AC ON/OFF test turn on 58sec; turn off 2sec		TEST: OK																																																																		



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (4) Acceleration: 5G (5) Test Time: 60 min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P : FULL LOAD Ta= 25.0°C LIFE TIME (2) I/P: 230VAC O/P : FULL LOAD Ta= 75.0°C LIFE TIME (3) I/P: 230VAC O/P : 75% LOAD Ta= 75.0°C LIFE TIME (4) I/P: 230VAC O/P : 50% LOAD Ta= 75.0°C LIFE TIME	(1). 158118 HRS (2). 70605.6 HRS (3). 79278 HRS (4). 88914 HRS
10	MTBF	13571.4K hrs min. Telcordia SR-332 (Bellcore) ; 1960.2K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 75°C O/P: FULL LOAD	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014