



# Test Report: LSP-160-36

---

160W Slim Type with PFC Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	34.2V ~ 37.8V	I/P : 230 VAC O/P : MIN LOAD Ta : 25°C	32.63V~38.96V/230VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	-1% ~ 1%	I/P: 90VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	0.11%~ 0.14 %
3	LINE REGULATION (Max)	-0.3% ~ 0.3%	I/P: 90VAC~ 264VAC O/P:FULL LOAD Ta:25°C	0 %~ 0 %
4	LOAD REGULATION(Max)	-0.5% ~ 0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	0 %~ 0.03 %
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	2.44 %
6	RIPPLE & NOISE(Max)	240mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	51 mVp-p

high frequency :

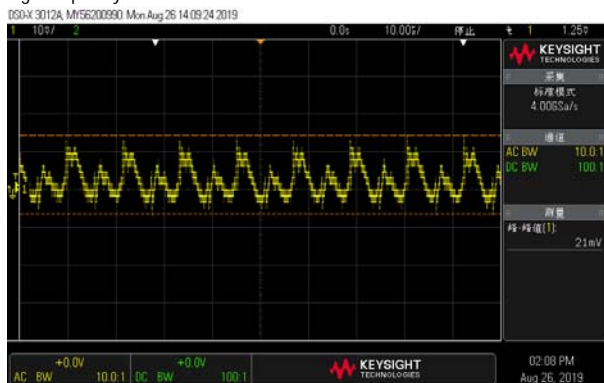

low frequency :

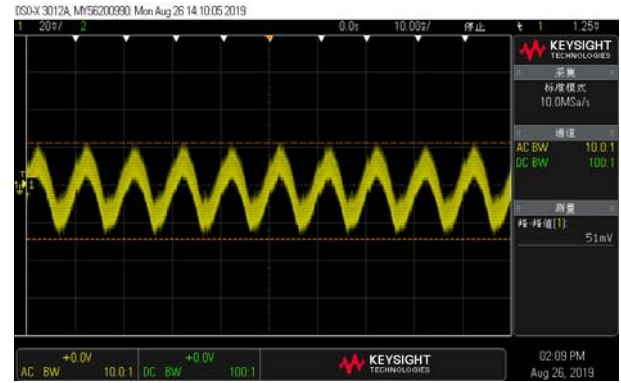

7	SET UP TIME(Max)	230VAC/2000ms 115VAC/3000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 463.0 ms 115VAC/ 612.0 ms
---	------------------	--------------------------------	--	--------------------------------------

INPUT=230VAC/50HZ @ FULL LOAD




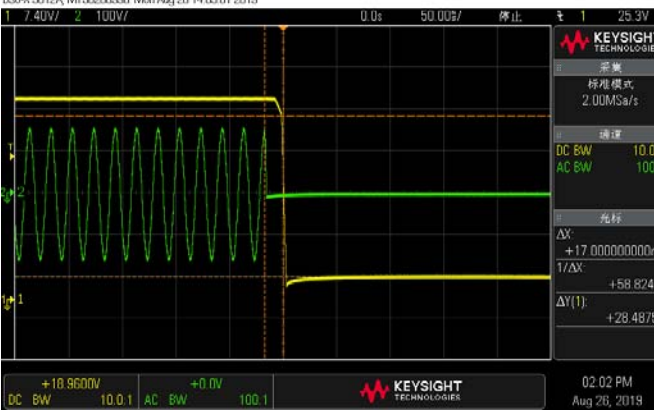
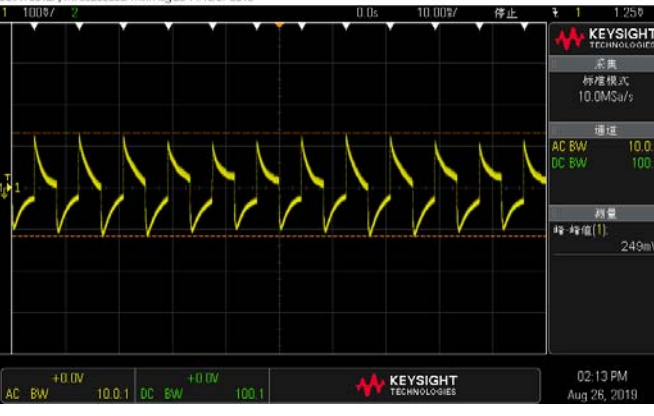

CH1 : Output Voltage CH2 : AC Input Voltage



INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

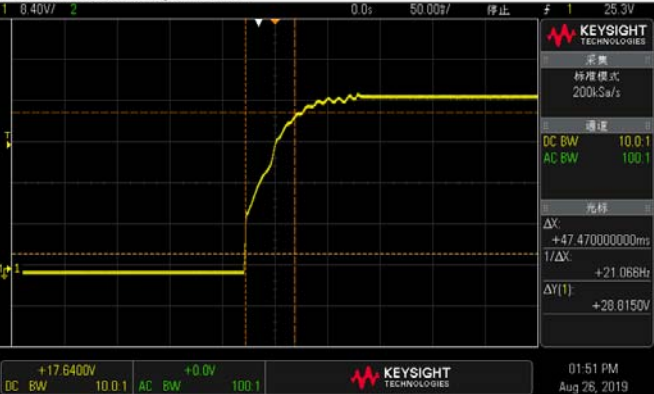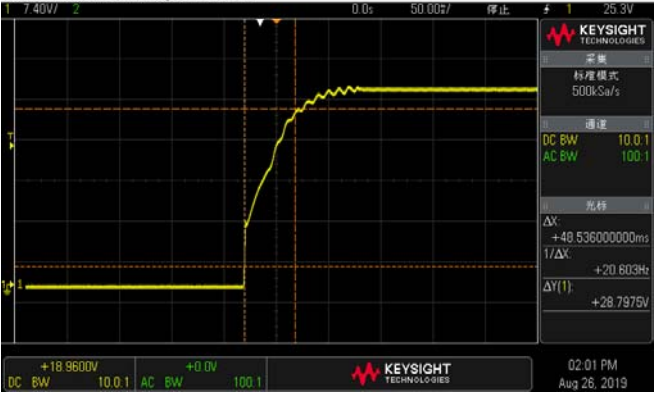


<p><b>8</b> RISE TIME (Max)</p>	<p>230VAC/80ms 115VAC/80ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 47.47 ms 115VAC/ 48.54 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p> 	
<p><b>9</b> HOLD UP TIME (Typ.)</p>	<p>230VAC/10ms 115VAC/10ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 17 ms 115VAC/ 17 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 	
<p><b>10</b> DYNAMIC LOAD</p>	<p>V1: 3600mVp-p</p>	<p>I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ</p>	<p>(1) 249mVp-p (2) 175mVp-p</p>
<p>FULL /50% LOAD 50%DUTY / 120HZ</p> 		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p> 	

### INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	100VAC-264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	97V-300V
			I/P: LOW-LINE-3V=97VAC HIGH-LINE+15%=300VAC O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:PASS
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100VAC ~264 VAC O/P:FULL-MIN LOAD Ta:25°C	TEST: PASS
3	INPUT CURRENT (Typ.)	230V/ 1.1A 115V/ 2.2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 0.77 A/ 230VAC I = 1.54 A/ 115VAC
4	LEAKAGE CURRENT	<.75 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.481mA N-FG : 0.479mA
5	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.972/230VAC PF=0.991/115VAC

P.F vs LOAD

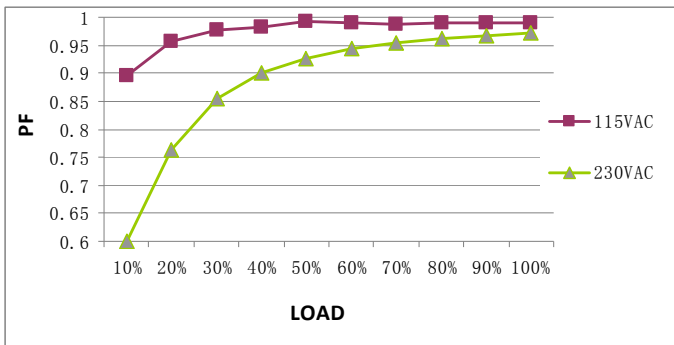

6	EFFICIENCY(Typ.)	93.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	93.90 %
---	------------------	-------	---	---------

EFFICIENCY vs LOAD

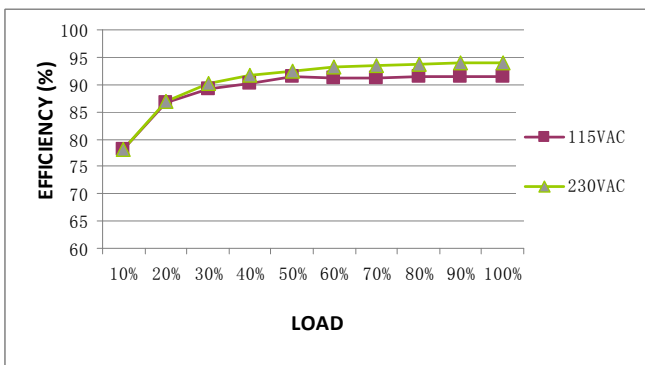

7	INRUSH CURRENT(Typ.)	230V/85A 115V/45A COLD START	I/P : 230 VAC/50Hz I/P : 115 VAC/60Hz O/P : FULL LOAD Ta : 25°C	I=82.5A/ 230VAC I=43.0A/ 115VAC T50=416 us/230V
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH4 : Input current</p>		<p>INPUT=115VAC/ 60HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH4 : Input current</p>		

### PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 140%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P:TESTING Ta:25°C	119.8%/ 264VAC 119.1%/ 230VAC 119.0%/100VAC PROTECTION TYPE : Constant current limiting,continuous increase of load will be hiccup protection, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	39.6V~46.8V	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P:MIN LOAD Ta:25°C	42.52V/ 264VAC 42.88V/ 230VAC 42.73V/ 100VAC PROTECTION TYPE : Shut down o/p voltage · re-power on to recovery
3	OVER TEMPERATURE PROTECTION	Protection type : NO DAMAGE	I/P: 264VAC I/P: 100VAC O/P:FULL LOAD	O.T.P: Active Protection type : Shut down o/p voltage · re-power on to recovers after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 100VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode,recovers automatically after fault condition is removed

### CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC OK CONTACT RATINGS	15VDC/10mA RESISTIVE LOAD	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST : OK

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2 Rated 11A/ 650V	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =300V VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>I/P:Low-Line -3V = 97V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>Ta:25°C</p>	<p>VDS:</p> <p>(1)478V (2)482V (3)482V (4)478V (5)482V (6)478V</p> <p>VDS: (1)442V (2)430V (3)442V (4)442V (5)442V (6)438V</p>
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q3 Rated 12A/ 600V	<p>I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>I/P:Low-Line -3V = 97V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>Ta:25°C</p>	<p>VDS:</p> <p>(1)430V (2)434V (3)438V (4)438V (5)438V (6)434V</p> <p>VDS: (1)446V (2)405V (3)446V (4)446V (5)446V (6)442V</p>

4	P.F.C DIODE	D6 Rated 8 A/ 600V	<p>I/P:High-Line +3V =267 V AC ON/OFF</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>I/P:Low-Line -3V = 97V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>Ta:25°C</p>	<p>(1) 414V (2) 381V (3) 414V (4) 405V</p> <p>(1) 418V (2) 401V (3) 426V (4) 418V</p>																		
5	SR MOS	<p>Q100 Rated 51 A/ 100V</p> <p>Q104 Rated 51 A/ 100V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267 V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) NO LOAD</p> <p>Ta:25°C</p>	<table border="0"> <tr> <td>Q101:</td> <td>Q104:</td> </tr> <tr> <td>VDS:</td> <td>VDS:</td> </tr> <tr> <td>(1)87.2V</td> <td>(1)82.6V</td> </tr> <tr> <td>(2)83.6V</td> <td>(2)10.1V</td> </tr> <tr> <td>(3)82.8V</td> <td>(3)81.7V</td> </tr> <tr> <td>(4)90.2V</td> <td>(4)82.5V</td> </tr> <tr> <td>(5)83. 0V</td> <td>(5)82.5V</td> </tr> <tr> <td>(6)82.2V</td> <td>(6)82.5V</td> </tr> <tr> <td>(7) 82. 1V</td> <td>(7) 78.6V</td> </tr> </table>	Q101:	Q104:	VDS:	VDS:	(1)87.2V	(1)82.6V	(2)83.6V	(2)10.1V	(3)82.8V	(3)81.7V	(4)90.2V	(4)82.5V	(5)83. 0V	(5)82.5V	(6)82.2V	(6)82.5V	(7) 82. 1V	(7) 78.6V
Q101:	Q104:																					
VDS:	VDS:																					
(1)87.2V	(1)82.6V																					
(2)83.6V	(2)10.1V																					
(3)82.8V	(3)81.7V																					
(4)90.2V	(4)82.5V																					
(5)83. 0V	(5)82.5V																					
(6)82.2V	(6)82.5V																					
(7) 82. 1V	(7) 78.6V																					
6	Input Capacitor Voltage	C5 Rated: 56 $\mu$ / 420V	<p>I/P:High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue</p> <p>Ta:25°C</p>	<p>(1)402V (2)390V (3)402V (4) 390V</p>																		
7	Control IC Voltage Test	<p>PWM IC U2 Rated 20V</p> <p>PFC IC U1 Rated 20V</p> <p>O/P IC U100 Rated 26 V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267 V O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(Low LINE)</p> <p>Ta:25°C</p>	<table border="0"> <tr> <td>U1</td> <td>U2</td> <td>U100</td> </tr> <tr> <td>(1)15.3V</td> <td>15.9V</td> <td>14.3V</td> </tr> <tr> <td>(2)15.5V</td> <td>16.1V</td> <td>2.44V</td> </tr> <tr> <td>(3)15.3V</td> <td>15.9V</td> <td>8.57V</td> </tr> <tr> <td>(4)11.1 V</td> <td>13.3V</td> <td>12.4V</td> </tr> <tr> <td>(5) 14.7V</td> <td>15.1V</td> <td>14.6V</td> </tr> </table>	U1	U2	U100	(1)15.3V	15.9V	14.3V	(2)15.5V	16.1V	2.44V	(3)15.3V	15.9V	8.57V	(4)11.1 V	13.3V	12.4V	(5) 14.7V	15.1V	14.6V
U1	U2	U100																				
(1)15.3V	15.9V	14.3V																				
(2)15.5V	16.1V	2.44V																				
(3)15.3V	15.9V	8.57V																				
(4)11.1 V	13.3V	12.4V																				
(5) 14.7V	15.1V	14.6V																				
8	VCC Diode Peak Voltage	<p>D20 Rated: 1A/200V</p> <p>D201 Rated: 1A/200V</p>	<p>I/P: High-Line +3V = 267VAC O/P: (1) FULL Load input on/off (2) Output Short (3) NO Load (4) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz</p>	<table border="0"> <tr> <td>D20</td> <td>D201</td> </tr> <tr> <td>(1) 64.7V</td> <td>64. 7V</td> </tr> <tr> <td>(2) 15.6V</td> <td>7.09V</td> </tr> <tr> <td>(3) 52.6V</td> <td>11.36V</td> </tr> <tr> <td>(4) 65.5V</td> <td>64.9V</td> </tr> </table>	D20	D201	(1) 64.7V	64. 7V	(2) 15.6V	7.09V	(3) 52.6V	11.36V	(4) 65.5V	64.9V								
D20	D201																					
(1) 64.7V	64. 7V																					
(2) 15.6V	7.09V																					
(3) 52.6V	11.36V																					
(4) 65.5V	64.9V																					

### SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG : 2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.2KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5KVAC/min Ta:25°C	I/P-O/P: 3.320mA I/P-FG: 3.263mA O/P-FG: 2.767mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: >9999MΩ I/P-FG: >9999MΩ O/P-FG: 4540MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	8mΩ
4	Withstand surge input	I/P: 300VAC*5s	I/P: 310VAC*5s O/P: FULL LOAD/NO LOAD Ta:25°C	NO DAMAGE

### E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 HEAVY INDUSTRY Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 HEAVY INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 HEAVY INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results please refer to the latest EMC test report.			



■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																												
1	TEMPERATURE RISE TEST	MODEL : LSP-160-48 1. ROOM AMBIENT BURN-IN : HRS I/P : 230VAC O/P : FULL LOAD Ta=25.4 °C 2. HIGH AMBIENT BURN-IN : HRS I/P : 230VAC O/P : FULL LOAD Ta=51.9 °C																																																																																																														
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=25.4 °C</th> <th>HIGH AMBIENT Ta=51.9 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>ZNR1</td><td>36.3°C</td><td>63.8°C</td></tr> <tr><td>2</td><td>RTH2</td><td>63.8°C</td><td>83.0°C</td></tr> <tr><td>3</td><td>LF2</td><td>47.5°C</td><td>74.5°C</td></tr> <tr><td>4</td><td>L1</td><td>43.8°C</td><td>71.6°C</td></tr> <tr><td>5</td><td>C5</td><td>40.6°C</td><td>68.5°C</td></tr> <tr><td>6</td><td>C6</td><td>39.9°C</td><td>67.7°C</td></tr> <tr><td>7</td><td>C22</td><td>40.4°C</td><td>68.4°C</td></tr> <tr><td>8</td><td>C20</td><td>39.6°C</td><td>67.2°C</td></tr> <tr><td>9</td><td>BD1</td><td>55.1°C</td><td>80.5°C</td></tr> <tr><td>10</td><td>R20</td><td>40.5°C</td><td>68.4°C</td></tr> <tr><td>11</td><td>Q1</td><td>40.1°C</td><td>68.9°C</td></tr> <tr><td>12</td><td>Q3</td><td>43.8°C</td><td>72.2°C</td></tr> <tr><td>13</td><td>D6</td><td>43.0°C</td><td>71.2°C</td></tr> <tr><td>14</td><td>U1</td><td>41.7°C</td><td>69.2°C</td></tr> <tr><td>15</td><td>U2</td><td>40.3°C</td><td>67.8°C</td></tr> <tr><td>16</td><td>Q6</td><td>39.0°C</td><td>66.5°C</td></tr> <tr><td>17</td><td>T1</td><td>46.7°C</td><td>74.5°C</td></tr> <tr><td>18</td><td>Q100</td><td>38.1°C</td><td>65.8°C</td></tr> <tr><td>19</td><td>Q104</td><td>42.4°C</td><td>69.7°C</td></tr> <tr><td>20</td><td>U100</td><td>41.3°C</td><td>68.4°C</td></tr> <tr><td>21</td><td>J103</td><td>37.8°C</td><td>64.9°C</td></tr> <tr><td>22</td><td>C105</td><td>37.6°C</td><td>64.9°C</td></tr> <tr><td>23</td><td>C106</td><td>38.3°C</td><td>65.6°C</td></tr> <tr><td>24</td><td>C107</td><td>38.4°C</td><td>65.7°C</td></tr> <tr><td>25</td><td>RTH3</td><td>40.5°C</td><td>68.4°C</td></tr> <tr><td>26</td><td>TC</td><td>35.6°C</td><td>62.9°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=25.4 °C	HIGH AMBIENT Ta=51.9 °C	1	ZNR1	36.3°C	63.8°C	2	RTH2	63.8°C	83.0°C	3	LF2	47.5°C	74.5°C	4	L1	43.8°C	71.6°C	5	C5	40.6°C	68.5°C	6	C6	39.9°C	67.7°C	7	C22	40.4°C	68.4°C	8	C20	39.6°C	67.2°C	9	BD1	55.1°C	80.5°C	10	R20	40.5°C	68.4°C	11	Q1	40.1°C	68.9°C	12	Q3	43.8°C	72.2°C	13	D6	43.0°C	71.2°C	14	U1	41.7°C	69.2°C	15	U2	40.3°C	67.8°C	16	Q6	39.0°C	66.5°C	17	T1	46.7°C	74.5°C	18	Q100	38.1°C	65.8°C	19	Q104	42.4°C	69.7°C	20	U100	41.3°C	68.4°C	21	J103	37.8°C	64.9°C	22	C105	37.6°C	64.9°C	23	C106	38.3°C	65.6°C	24	C107	38.4°C	65.7°C	25	RTH3	40.5°C	68.4°C	26	TC	35.6°C	62.9°C		
NO	Position	ROOM AMBIENT Ta=25.4 °C	HIGH AMBIENT Ta=51.9 °C																																																																																																													
1	ZNR1	36.3°C	63.8°C																																																																																																													
2	RTH2	63.8°C	83.0°C																																																																																																													
3	LF2	47.5°C	74.5°C																																																																																																													
4	L1	43.8°C	71.6°C																																																																																																													
5	C5	40.6°C	68.5°C																																																																																																													
6	C6	39.9°C	67.7°C																																																																																																													
7	C22	40.4°C	68.4°C																																																																																																													
8	C20	39.6°C	67.2°C																																																																																																													
9	BD1	55.1°C	80.5°C																																																																																																													
10	R20	40.5°C	68.4°C																																																																																																													
11	Q1	40.1°C	68.9°C																																																																																																													
12	Q3	43.8°C	72.2°C																																																																																																													
13	D6	43.0°C	71.2°C																																																																																																													
14	U1	41.7°C	69.2°C																																																																																																													
15	U2	40.3°C	67.8°C																																																																																																													
16	Q6	39.0°C	66.5°C																																																																																																													
17	T1	46.7°C	74.5°C																																																																																																													
18	Q100	38.1°C	65.8°C																																																																																																													
19	Q104	42.4°C	69.7°C																																																																																																													
20	U100	41.3°C	68.4°C																																																																																																													
21	J103	37.8°C	64.9°C																																																																																																													
22	C105	37.6°C	64.9°C																																																																																																													
23	C106	38.3°C	65.6°C																																																																																																													
24	C107	38.4°C	65.7°C																																																																																																													
25	RTH3	40.5°C	68.4°C																																																																																																													
26	TC	35.6°C	62.9°C																																																																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 123.1%LOAD Ta : 25°C	TEST : OK																																																																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/110VAC O/P : 100%LOAD Ta= -35°C	TEST : OK																																																																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C /95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK																																																																																																												
5	TEMPERATURE COEFFICIENT	±0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	±0.008 %/°C (0-50°C)																																																																																																												



6	STORAGE TEMPERATURE TEST	-40-85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC
7	THERMAL SHOCK TEST	-30-50°C	1. Thermal shock Temperature : -35°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 6G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	LSP-160-48 : SUPPOSE C107 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=50 °C LIFE TIME	(1) 44774423HRS (2) 2296307HRS (3) 3062175HRS (4) 4178295HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 699.54 K hrs min. Telcordia SR-332 (Bellcore) 282.71K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/ZHOUBIAO	WENF	LIUWY

2018.4.30 GP-A50-F010