



Test Report: SLD-80-24

80W Constant Voltage+ Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



■ RELIABILITY TEST

Environment Test



DESIGN VERIFY TEST







OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	16.8V~24V	I/P: 230VAC O/P: LED MODE Ta: 25°C	7.5V~ 24 V
2	VOLTAGE TOLERANCE	-4%~+4%	I/P: 90VAC / 305VAC O/P: FULL/ NO LOAD Ta: 25°C	-0.42%~0.79%
3	LINE REGULATION	-0.5%~+0.5%	I/P: 90VAC ~ 305VAC O/P: FULL LOAD Ta: 25°C	0.04%~0.08%
4	LOAD REGULATION	-0.5%~+0.5%	I/P: 230VAC O/P: FULL ~NO LOAD Ta: 25°C	-0.17%~0.17%
5	OVER/UNDERSHOOT TEST	<±5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	±2.29%
6	RIPPLE & NOISE (Max)	240mVp-p	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	144mVp-p

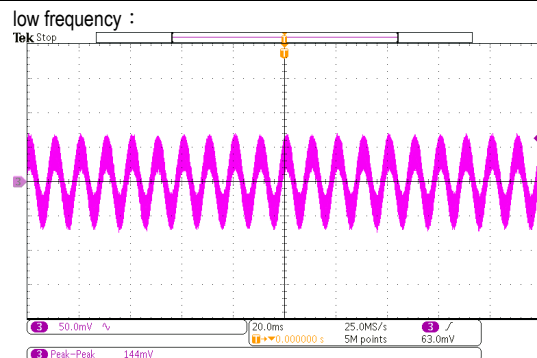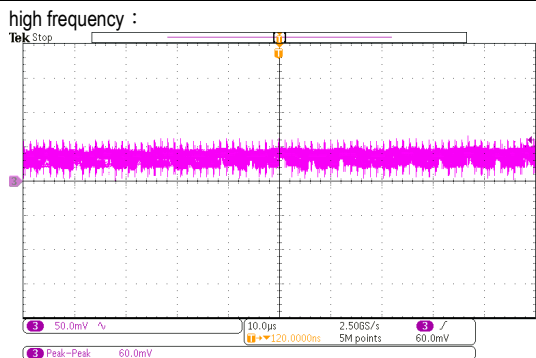

7	SET UP TIME(Max)	115VAC/500ms 230VAC/ 500ms	I/P: 115 VAC I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	115VAC/ 182 ms 230VAC/ 170 ms
---	------------------	-------------------------------	--	----------------------------------

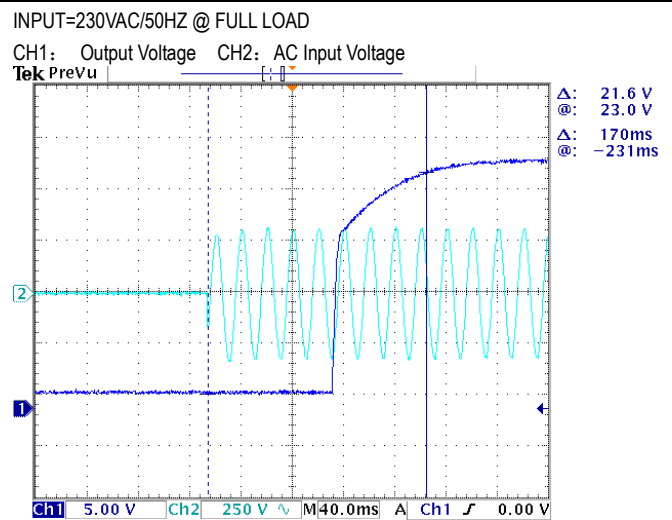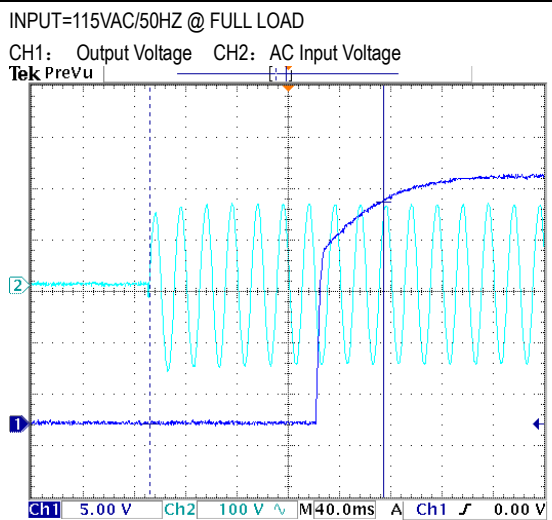

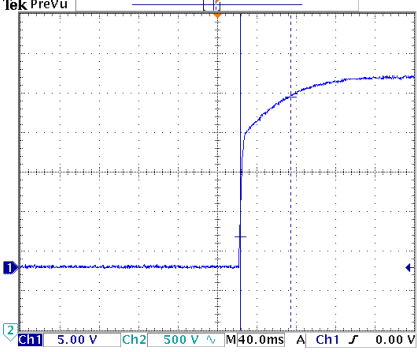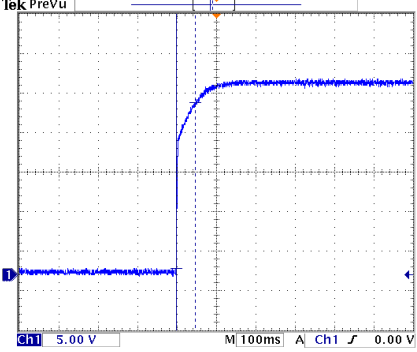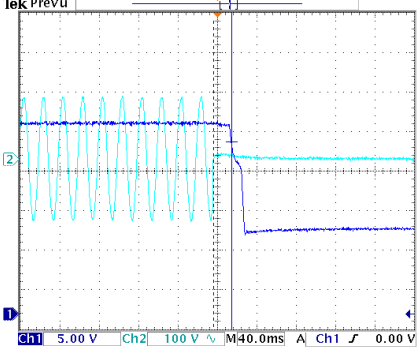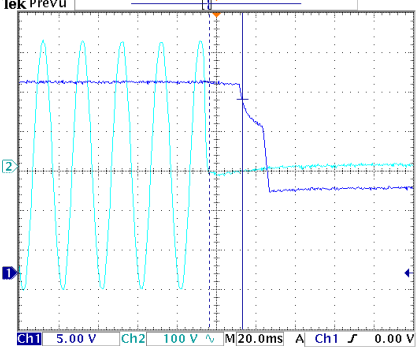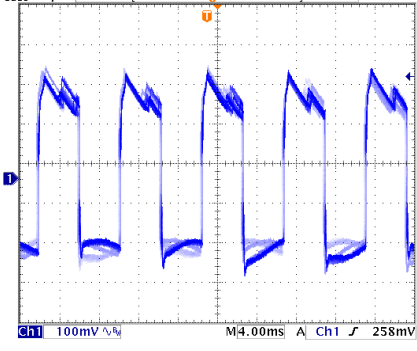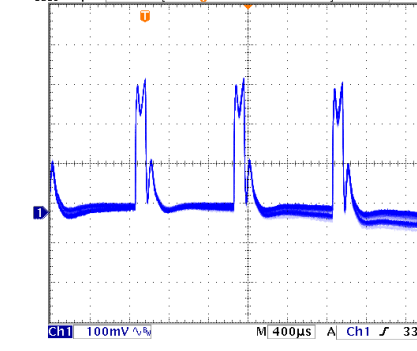
8	RISE TIME (Max) 115VAC/ 80ms 230VAC/ 80ms	I/P: 115 VAC I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	115VAC/ 51.2 ms 230VAC/ 48.0 ms
INPUT=115VAC/50HZ @ FULL LOAD CH1: Output Voltage 		INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage 	
9	HOLD UP TIME(Typ) 115VAC/ 10ms 230VAC/ 10ms	I/P: 115 VAC I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	115VAC/ 18.4 ms 230VAC/ 16.8 ms
INPUT=115VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage 		INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage 	
10	DYNAMIC LOAD V1: 2400 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta: 25°C	(1) 514mVp-p (2) 354mVp-p
FULL /50% LOAD 50%DUTY / 120HZ 		FULL /50% LOAD 50%DUTY / 1KHZ 	

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	100VAC~305VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	90V~ 308 V
			I/P: (1)LOW-LINE-3V=97 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305 VAC O/P: FULL~NO LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.38A/277VAC 0.45A/230VAC 0.9A/115VAC	I/P: 277 VAC I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I=0.31 A/ 277VAC I=0.36 A/ 230VAC I=0.72 A/ 115VAC
4	LEAKAGE CURRENT	< 0.25mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.028 mA N-FG: 0.028 mA
5	NO LOAD CONSUMPTION	<0.5W	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.36W
6	INRUSH CURRENT(Typ)	230VAC/ 50A COLD START (twidth=270us measured at 50% Ipeak) COLD START at 230V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I = 41.8A/ 230VAC Twidth =232 us/50% Ipeak
INPUT=230VAC/50HZ @ FULL LOAD CH2: Input current CH1: AC Input Voltage				


7	EFFICIENCY(Typ)	91.5%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	92.51%
---	-----------------	-------	---	--------

EFFICIENCY vs LOAD

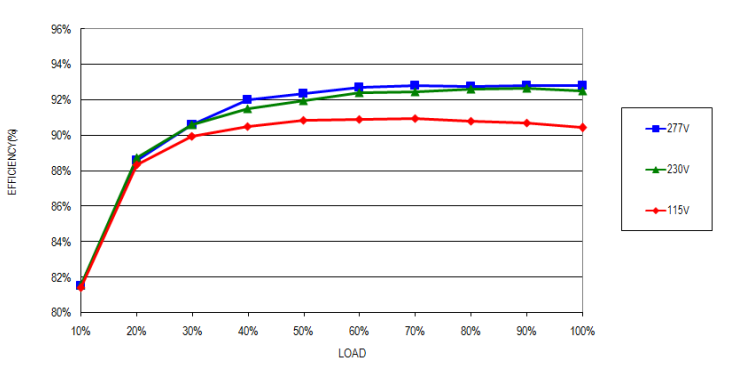


8	POWER FACTOR	0.92/ 277VAC 0.95/ 230VAC 0.97/ 115VAC	I/P: 277 VAC I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	PF= 0.94 / 277VAC PF= 0.97 / 230VAC PF= 0.99 / 115VAC
---	--------------	--	--	---

P.F vs LOAD

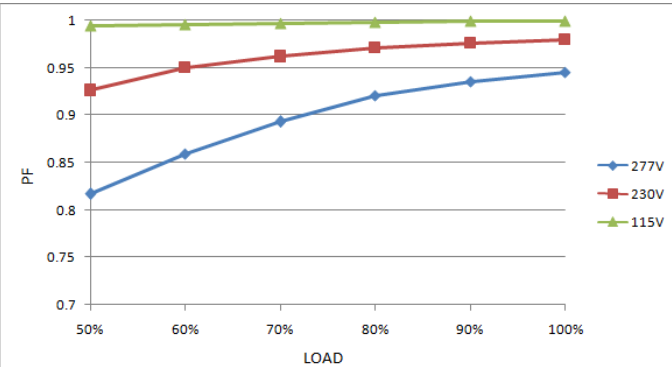

9	TOTAL HARMONIC DISTORTION	THD < 10% (@load ≥ 50%/115VAC, @load ≥ 50%/230VAC, @load ≥ 75%/277VAC)	I/P: 115 VAC/50% LOAD I/P: 230 VAC/50% LOAD I/P: 277 VAC/75% LOAD Ta: 25°C	THD=4.26% @50% load /115VAC THD=5.82% @50% load /230VAC THD=8.92% @75% load /277VAC
---	---------------------------	---	---	---

THD vs LOAD

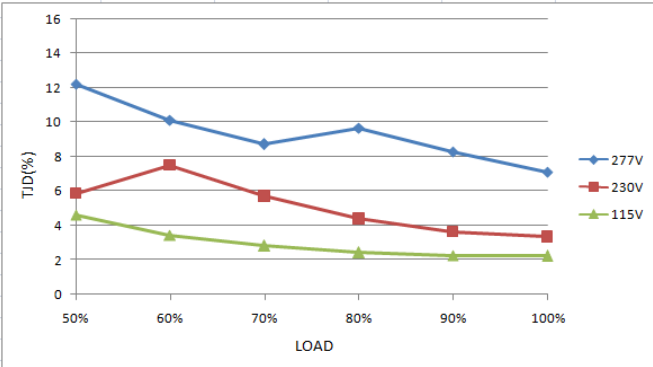

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	95%~108%	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: TESTING Ta: 25°C	102 %/ 100VAC 102 %/ 230VAC 102 %/ 305VAC Constant Current Limiting or Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	28V~34V	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: NO LOAD Ta: 25°C	31.7V/ 100VAC 31.9V/ 230VAC 31.9V/ 305VAC Shut down and latch off o/p voltage. re-power on to recovery
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD	O.T.P. Active Hiccup mode, recovers automatically after fault condition is removed
4	SHORT CIRCUIT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 100VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q 2 Rated 6A/600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 456 V (2) 472 V (3) 440 V
2	Diode Peak Voltage	D100 Rated 20A/100V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 57.6 V (2) 10.4 V (3) 57.2 V
3	PFC Transistor	Q1 Rated 11A/600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 472 V (2) 480 V (3) 482 V
4	P.F.C DIODE	D5 Rated 9A/ 600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1)452V (2)456V (3)434V
5	Control IC	U1 Rated 27V (MAX.)	I/P: High-Line +3V =308 V O/P: ((1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P (5) Low Line No Load Vo(min) Ta: 25°C	(1) 12.2 V (2) 12.1 V (3) 12.2 V (4) 12.2 V (5) 12.2 V

6	Input Capacitor Voltage	C5 Rated: 18 μ F/ 450 V	I/P: High-Line +3V =308 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta: 25°C	(1)454V (2)446V (3)454V (4)446V
---	-------------------------	--------------------------------	---	--

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.125 KVAC/min Ta: 25°C	I/P-O/P: 1.765 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100M Ω	I/P-O/P: 500 VDC Ta: 25°C	I/P-O/P: >9999 M Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230 VAC/50HZ O/P: FULL/50% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results please refer to the latest EMC test report.			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																								
1	TEMPERATURE RISE TEST	MODEL: SLD-80-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=27.0°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=51.1°C																																																																										
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=27.0 °C</th> <th>HIGH AMBIENT Ta=51.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>56.0°C</td><td>77.7°C</td></tr> <tr><td>2</td><td>C8</td><td>51.9°C</td><td>73.8°C</td></tr> <tr><td>3</td><td>L2</td><td>52.7°C</td><td>74.5°C</td></tr> <tr><td>4</td><td>Q1</td><td>60.6°C</td><td>82.3°C</td></tr> <tr><td>5</td><td>R7</td><td>59.1°C</td><td>81.2°C</td></tr> <tr><td>6</td><td>C6</td><td>56.5°C</td><td>78.5°C</td></tr> <tr><td>7</td><td>Q2</td><td>63.1°C</td><td>85.8°C</td></tr> <tr><td>8</td><td>U2</td><td>71.6°C</td><td>94.3°C</td></tr> <tr><td>9</td><td>L3</td><td>65.2°C</td><td>87.6°C</td></tr> <tr><td>10</td><td>C51</td><td>60.1°C</td><td>82.7°C</td></tr> <tr><td>11</td><td>C15</td><td>69.1°C</td><td>91.5°C</td></tr> <tr><td>12</td><td>T1core</td><td>81.6°C</td><td>105.4°C</td></tr> <tr><td>13</td><td>D100</td><td>98.2°C</td><td>122.3°C</td></tr> <tr><td>14</td><td>C105</td><td>68.8°C</td><td>92.6°C</td></tr> <tr><td>15</td><td>J100</td><td>69.1°C</td><td>91.2°C</td></tr> <tr><td>16</td><td>RTH2</td><td>75.2°C</td><td>99.0°C</td></tr> <tr><td>17</td><td>TC</td><td>61.2°C</td><td>83.9°C</td></tr> </tbody> </table>			NO	Position	ROOM AMBIENT Ta=27.0 °C	HIGH AMBIENT Ta=51.1 °C	1	BD1	56.0°C	77.7°C	2	C8	51.9°C	73.8°C	3	L2	52.7°C	74.5°C	4	Q1	60.6°C	82.3°C	5	R7	59.1°C	81.2°C	6	C6	56.5°C	78.5°C	7	Q2	63.1°C	85.8°C	8	U2	71.6°C	94.3°C	9	L3	65.2°C	87.6°C	10	C51	60.1°C	82.7°C	11	C15	69.1°C	91.5°C	12	T1core	81.6°C	105.4°C	13	D100	98.2°C	122.3°C	14	C105	68.8°C	92.6°C	15	J100	69.1°C	91.2°C	16	RTH2	75.2°C	99.0°C	17	TC	61.2°C	83.9°C
NO	Position	ROOM AMBIENT Ta=27.0 °C	HIGH AMBIENT Ta=51.1 °C																																																																									
1	BD1	56.0°C	77.7°C																																																																									
2	C8	51.9°C	73.8°C																																																																									
3	L2	52.7°C	74.5°C																																																																									
4	Q1	60.6°C	82.3°C																																																																									
5	R7	59.1°C	81.2°C																																																																									
6	C6	56.5°C	78.5°C																																																																									
7	Q2	63.1°C	85.8°C																																																																									
8	U2	71.6°C	94.3°C																																																																									
9	L3	65.2°C	87.6°C																																																																									
10	C51	60.1°C	82.7°C																																																																									
11	C15	69.1°C	91.5°C																																																																									
12	T1core	81.6°C	105.4°C																																																																									
13	D100	98.2°C	122.3°C																																																																									
14	C105	68.8°C	92.6°C																																																																									
15	J100	69.1°C	91.2°C																																																																									
16	RTH2	75.2°C	99.0°C																																																																									
17	TC	61.2°C	83.9°C																																																																									
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/110VAC O/P: 100% LOAD Ta= -25°C	TEST: OK																																																																								
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=50°C HUMIDITY= 95 %R.H	TEST: OK																																																																								
4	TEMPERATURE COEFFICIENT	±0.03 %/°C (0~60°C)	I/P: 230 VAC O/P: FULL LOAD	±0.0224 %/°C (0~60°C)																																																																								
5	STORAGE TEMPERATURE TEST	-40°C ~ +80°C	1. Thermal shock Temperature: -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10CYCLE 5. Input/Output condition: STATIC TEST: OK																																																																									
6	THERMAL SHOCK TEST	-20~+50°C	1. Thermal shock Temperature: -25°C ~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16CYCLE 5. Input/Output condition: 15cycle:230VAC/ FULL LOAD AC on 3 sec/AC off 1 sec TEST 1cycle:230VAC/ FULL LOAD Burn In Test TEST: OK																																																																									



7	VIBRATION TEST	10~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 12min/sweep cycle (4) Acceleration: 3G (5) Test Time: 72min in each axis (X.Y.Z) (6) Ta: 25°C TEST: OK
8	CAPACITOR LIFE CYCLE	SLD-80-24: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Tc= 75 °C LIFE TIME (2) I/P: 230VAC O/P: 75% LOAD Tc= 75 °C LIFE TIME (3) I/P: 230VAC O/P: 50% LOAD Tc= 75 °C LIFE TIME	(1) 37081 HRS (2) 47965 HRS (3) 68039 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 2666.8K hrs min. Telcordia SR-332 (Bellcore) ; 260.9K hrs min. MIL-HDBK-217F (25°C)	
10	Ongoing Reliability Test	I/P: 230VAC O/P: FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/ZHOUB	WENF	LIUWY